
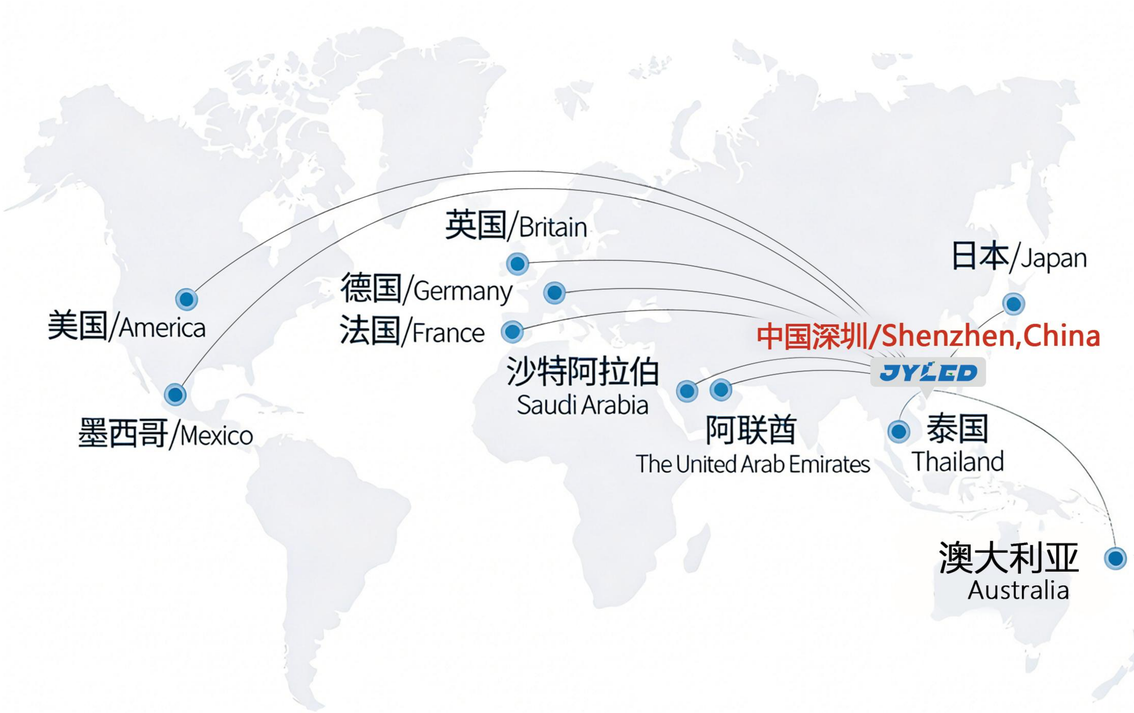


JYLED

PRODUCT CATALOGUE

LED显示屏产品目录

FOCUS ON SUPERIOR QUALITY YOU DESERVE THE BEST !

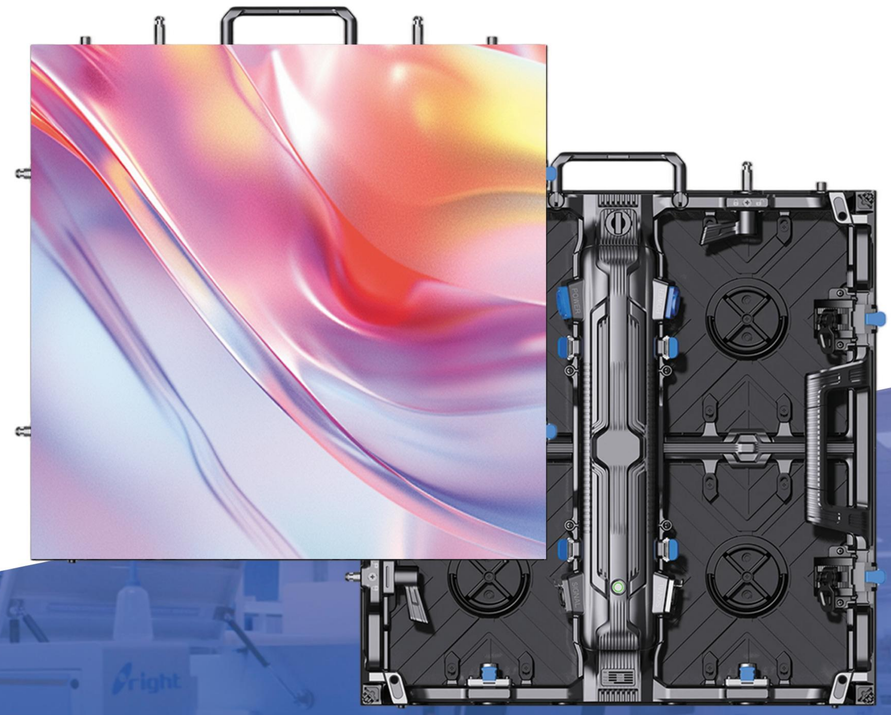

Company:Shenzhen JYLED Technology Co,. Ltd

Address:Building 4, Huafeng Zhenbao LED Industrial Park, Beihuan Rd, Shiyan St, Bao'An , Shenzhen, China

Tell:+86-755-32919066

www.szjy-led.com

深圳市晶元全彩科技设备有限公司

SHENZHEN JYLED TECHNOLOGY CO., LTD

CONTENTS

01

Enterprise Section

公司介绍 / Company Profile

企业优势 / Enterprise Advantages

企业荣誉 / Enterprise Honor

企业文化 / Enterprise Culture

02

Product Introduction

广告传媒系列 / Advertising Media Series

舞台租赁屏系列 / Stage Rental Screen Series

室内高清屏系列 / Indoor HD Screen Series

广告机系列 / Advertising Machine Series

透明屏系列 / Transparent Screen Series

互动地砖屏系列 / Interactive Floor Screen Series

球场屏系列 / Stadium LED Screen Series

创意屏系列 / Creative Screen Series

03

Case Studies & Trivia

工程案例 / Project Case

LED知识 / Led Knowledge

COMPANY PROFILE
公司介绍

深圳市晶元全彩科技设备有限公司致力于室内外LED显示产品的研发、制造和销售。本公司具有10多年的LED显示屏供应经验，在国内外享有良好的声誉。我们坚持"高效、诚信"的原则，严格按照ISO9001:2015质量体系要求，坚持为客户提供优质、合理的价格、真诚的服务和快速的技术支持。产品远销全球100多个国家。

Shenzhen JYLED technology co., ltd devotes to developing, and marketing Indoor & outdoor LED display products. our having more than 10 years experience in supplying led display with good reputation in home and abroad. we adhere to the principle of “ high-integrity ”, strictly follow by the requirements of ISO9001:2015 quality system, and insist on offering customers with quality, reasonable price, sincere service and fast technical . Our products are exported to over 100 countries worldwide.





ENTERPRISE ADVANTAGES
企业优势

我们拥有多条先进生产线和专业设备，配备了经验丰富的供应链、研发、技术，生产、品质和售后服务团队，能够高效、保质保量地完成每个客户的订单。我们提供全方位的定制化服务，确保您的LED显示屏不仅能够满足不同的场景需求。

We have multiple advanced production lines and professional equipment, and are equipped with experienced supply chain, R&D, technology, production, quality and after-sales service teams, enabling us to complete each customer's order efficiently and with high quality. we provide a full range of customized services to ensure that your LED display can not only meet the needs of different scenarios.



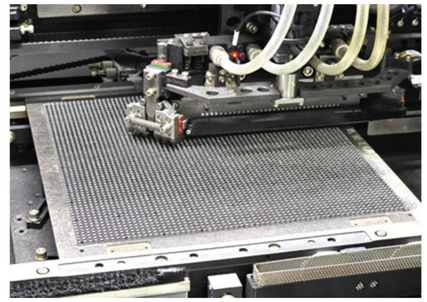

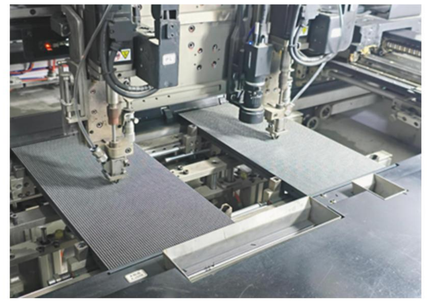



ENTERPRISE HONOR
企业荣誉















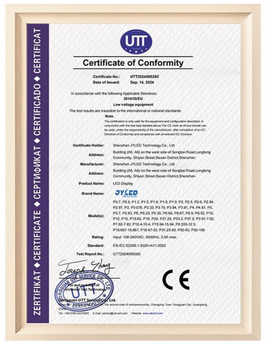









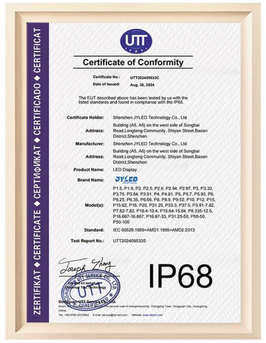

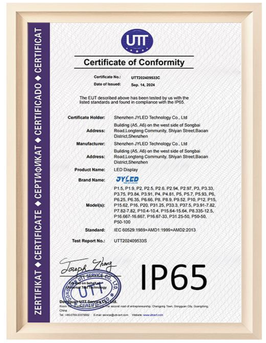

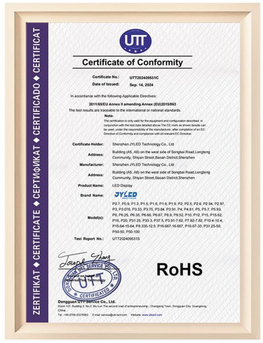



ENTERPRISE CULTURE
企业文化

Corporate Spirit
企业精神

坚韧笃行，创新致远；以诚立身，以质赋能

Perseverance and Innovation for the future;
Integrity as the foundation, quality as
the energizer

Corporate Mission
企业使命

为客户创造价值，为行业注入正向能量

To create real value for customers and
inject positive energy into the industry.

Corporate Vision
企业愿景

有担当的标杆企业

To become a reputable and responsible
benchmark enterprise in the industry.

Core Values
核心价值观

责任于心，协作于行，诚信为基

Responsibility in mind, collaboration in
action, Integrity as the foundation

ADVERTISING MEDIA SERIES


广告传媒系列

Indoor/Outdoor

以动态视觉冲击与全天候绚丽亮彩，让您的广告突破重围，深入人心。

With dynamic visual impact and vibrant colors all day long, your advertising breaks through the crowd and resonates deeply with people.



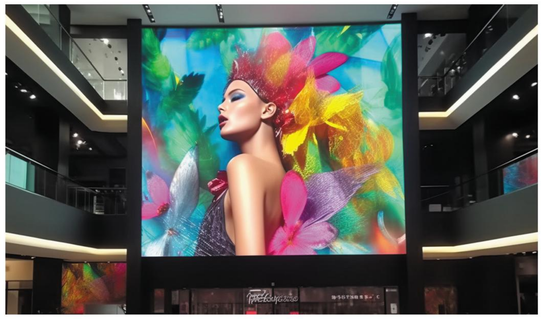





INDOOR FIXED INSTALLATION

室内固定安装

FA SERIES

960X960mm/Customizable







产品特点
PRODUCT FEATURES

可定制
Customizable

高对比度
High Contrast

前后维护
Front Rear Maintenance

160
广视角
Wide Viewing Angle

无缝拼接
Seamless Splicing

寿命长
Long Lifespan

高亮度
High Brightness

高刷新率
High Refresh Rate

产品参数/PRODUCT PARAMETERS

型号Model	P1.86	P2	P2.5	P3	P3.076	P4	P5
模组尺寸Module Size(mm)	320x160	320x160	320x160	192x192	320x160	320x160	320x160
模组分辨率Module Resolution(dot)	172x86	160x80	128x64	64x64	104x52	80x40	64x32
扫描Scanning(s)	1/43	1/40	1/32	1/32	1/26	1/16	1/16
封装方式Encapsulation	SMD/GOB						
维护方式Maintenance	Front/Rear						
安装方式Installation	Front/Rear						
箱体尺寸Cabinet Size(mm)	960x960(Customizable)						
每平方像素点Density(dot/㎡)	288369	250000	160000	111111	105625	62500	40000
亮度Brightness(cd/㎡)	600/800/1200						
防水等级IP Rate	IP31/IP43						
刷新率Refresh Rate(Hz)	3840						
箱体重量Cabinet Weight (kg)	20						
箱体材料Cabinet Material	Iron						
灰度Grayscale	14bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>1.8	>2	>2.5	>3	>3	>4	>5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	600/200						
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%						
寿命Life Span(h)	> 100,000						

OUTDOOR FIXED INSTALLATION

室外固定安装

FB SERIES

960X960mm/Customizable







Double-Sided Flip Cover



Single-Sided Flip Cover

产品特点
PRODUCT FEATURES

可定制
Customizable

高对比度
High Contrast

前后维护
Front Rear Maintenance

IP65防水等级
IP65 Waterproof Rating

无缝拼接
Seamless Splicing

寿命长
Long Lifespan

高亮度
High Brightness

耐高低温性能
Temperature Resistance Performance

产品参数/PRODUCT PARAMETERS

型号Model	P2.5	P3	P4	P5	P6	P8	P10
模组尺寸Module Size(mm)	320x160	192x192	320x160	320x160	192x192	320x160	320x160
模组分辨率Module Resolution(dot)	128x64	64x64	80x40	64x32	32x32	40x20	32x16
扫描Scanning(s)	1/32	1/16	1/10	1/8	1/8	1/5	1/2
封装方式Encapsulation	SMD						
维护方式Maintenance	Front	Rear	Rear	Rear	Rear	Rear	Rear
安装方式Installation	Front/Rear						
箱体尺寸Cabinet Size(mm)	960x960(Customizable)						
每平方像素点Density(dot/㎡)	160000	111111	62500	40000	27777	15625	10000
亮度Brightness(cd/㎡)	4500-5000	4500-6000	5000-6000	5000-6000	5000-6000	5500-8000	6000-10000
防水等级IP Rate	IP65	IP65	IP65	IP65	IP65	IP 65	IP65
刷新率Refresh Rate(Hz)	3840-7680						
箱体重量Cabinet Weight (kg)	26						
箱体材料Cabinet Material	Iron						
灰度Grayscale	14-16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>2.5	>3	>4	>5	>6	>8	>10
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	600/200	600/225	600/225	600/225	600/235	600/245	600/275
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%						
寿命Life Span(h)	> 100,000						

ENERGY-SAVING LED SCREEN

节能显示屏

FC SERIES


960X960mm/1000x1000mm











产品特点
PRODUCT FEATURES

可定制
Customizable

高对比度
High Contrast

前后维护
Front Rear Maintenance

IP65防水等级
IP65 Waterproof Rating

无缝拼接
Seamless Splicing

广视角
Wide Viewing Angle

高亮度
High Brightness

低功耗
Low Power Consumption

产品参数/PRODUCT PARAMETERS


型号Model	P2.976	P3.91	P4	P5	P6.67	P8	P10
模组尺寸Module Size(mm)	250x250	250x250	320x320	320x320	320x320	320x320	320x320
模组分辨率Module Resolution(dot)	84x84	64x64	80×80	64x64	48x48	40x40	32x32
扫描Scanning(s)	1/21	1/16	1/10	1/8	1/6	1/5	1/2
封装方式Encapsulation	SMD1415	SMD1921	SMD1921	SMD1921	SMD3535	SMD3535	SMD3535
维护方式Maintenance	Front						
安装方式Installation	Front/Rear						
箱体尺寸Cabinet Size(mm)	1000x1000	1000x1000	960x960	960x960	960x960	960x960	960x960
每平方像素点Density(dot/㎡)	112896	65536	62500	40000	22500	15625	10000
亮度Brightness(cd/㎡)	4500	4200/4500	5500/6000	5600/6000	5500/5800	5000/5500	6200/7000
防水等级IP Rate	IP65						
刷新率Refresh Rate(Hz)	3840-7680						
箱体重量Cabinet Weight (kg)	23						
箱体材料Cabinet Material	Iron	Iron	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
灰度Grayscale	14-16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>3	>4	>4	>5	>6	>8	>10
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	480/200						
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%						
寿命Life Span(h)	> 100,000						


INDOOR FIXED INSTALLATION

室内固定安装

FD SERIES

500x250mm/750x250mm
1000x250mm/1000x500mm

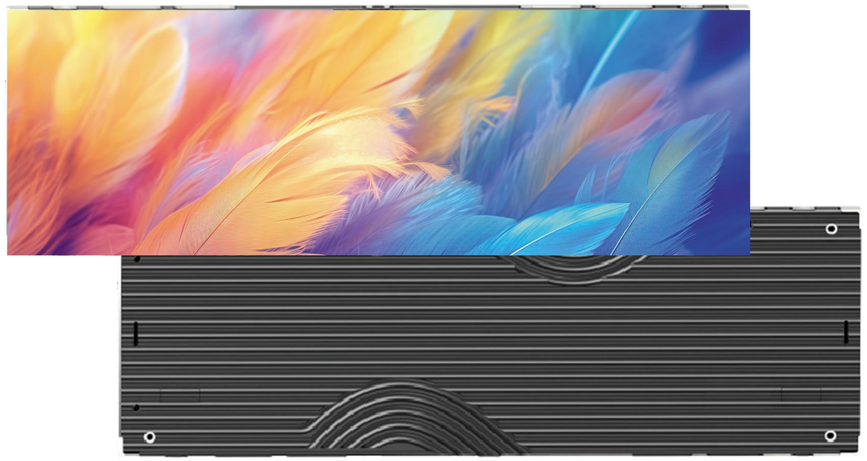

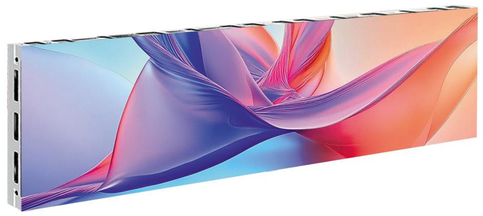

Single-Sided Option



Double-Sided Option

产品特点
PRODUCT FEATURES

硬连接
Hard Connection

前维护
Front Maintenance

直角拼接
Right Angle Splicing

广视角
Wide Viewing Angle

轻薄
Light Weight

灵活组装
Flexible Assembly

超高清
Ultra HD

高刷新率
High Refresh Rate

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.56	P1.95	P2.5	P2.604	P2.976	P3.91
模组尺寸Module Size(mm)	250X250						
模组分辨率Module Resolution(dot)	200x200	160x160	128x128	100x100	96x96	84x84	64x64
扫描Scanning(s)	1/50	1/40	1/32	1/25	1/32	1/28	1/16
封装方式Encapsulation	SMD1010(GOB)	SMD1212(GOB)	SMD1515(GOB)	SMD1515	SMD1515	SMD1515	SMD2020
维护方式Maintenance	Front						
安装方式Installation	Front						
箱体尺寸Cabinet Size(mm)	500x250/750x250/1000x250/1000x500						
每平方像素点Density(dot/㎡)	640000	409600	262144	160000	147456	112896	65536
亮度Brightness(cd/㎡)	600	600	800	800	800	800	800
防水等级IP Rate	IP31(SMD)/IP43(GOB)						
刷新率Refresh Rate(Hz)	3840						
箱体重量Cabinet Weight (kg)	9.8/5.0/4.0/3.0						
箱体材料Cabinet Material	Die-casting aluminum						
灰度Grayscale	16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>1.3	>1.6	>2	>2.5	>2.6	>3	>4
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	100-200/350						
适用标准Cert.	CCC/CE/RoHS/FCC						
储存温度湿度Storage Temperature&Humidity(RH)	-20~60℃/10%~85%						
寿命Life Span(h)	≥100,000						

ENERGY-SAVING LED SCREEN

节能显示屏

FE SERIES

1000x500mm/1000x1000mm
1500x500mm/1500x1000mm









产品特点
PRODUCT FEATURES

无缝拼接
Seamless Splicing

前后维护
Front Rear Maintenance

高亮度
High Brightness

广视角
Wide Viewing Angle

轻薄
Light Weight

节能
Energy Saving

超高清
Ultra HD

IP65防水等级
IP65 Waterproof Rating

产品参数/PRODUCT PARAMETERS

型号Model	P2.976	P3.91	P4.81	P6.25	P7.81	P10.42
模组尺寸Module Size(mm)	500x250					
模组分辨率Module Resolution(dot)	168x84	128x64	104x52	80x40	64x32	48x24
扫描Scanning(s)	1/21	1/16	1/13	1/8	1/4	1/2
封装方式Encapsulation	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727
维护方式Maintenance	Front/Rear					
安装方式Installation	Front/Rear					
箱体尺寸Cabinet Size(mm)	1000x500/1000X1000/1500x500/1500x1000					
每平方像素点Density(dot/㎡)	112896	65536	43264	25600	16384	9216
亮度Brightness(cd/㎡)	4500	5000	5000	6000-10000	6000-10000	6000-10000
防水等级IP Rate	IP65					
刷新率Refresh Rate(Hz)	3840-7680					
箱体重量Cabinet Weight (kg)	22.5					
箱体材料Cabinet Material	Aluminum cabinet					
灰度Grayscale	14-16Bit					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V160°/H160°					
最佳视距Best Viewing Distance(m)	>3	>4	>4.8	>6.2	>7.8	>10.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大/平均功耗Max./Avg. power consumption(w)	200-300/800	100-200/650	100-200/650	100-200/650	100-200/650	100-200/650
适用标准Cert.	CCC/CE/RoHS/FCC					
储存温度湿度Storage Temperature&Humidity(RH)	-20~60℃/10%~85%					
寿命Life Span(h)	> 100,000					

THE ARC CORNER OPTION

圆弧角选项

FE-C SERIES

562.5x1000mm/624.96x1000mm









产品特点
PRODUCT FEATURES

高端定制
High-End Customized

前后维护
Front Rear Maintenance

高亮度
High Brightness

广视角
Wide Viewing Angle

远程控制
Remote Control

节能
Energy Saving

超高清
Ultra HD

卓越防护
Superior Protection

产品参数/PRODUCT PARAMETERS

型号Model	P2.976	P3.91	P4.81	P6.25	P7.81	P10.42
模组尺寸Module Size(mm)	41.66x250	62.5x250	62.5x250	62.5x250	62.5x250	62.5x250
模组分辨率Module Resolution(dot)	168x84	128x64	104x52	80x40	64x32	48x24
扫描Scanning(s)	1/21	1/16	1/13	1/8	1/4	1/2
封装方式Encapsulation	SMD1921	SMD1921	SMD2727	SMD2727	SMD2727	SMD2727
维护方式Maintenance	Front/Rear					
安装方式Installation	Front/Rear					
箱体尺寸Cabinet Size(mm)	624.96x1000	562.5x1000	562.5x1000	562.5x1000	562.5x1000	562.5x1000
每平方像素点Density(dot/㎡)	112896	65536	43264	25600	16384	9216
亮度Brightness(cd/㎡)	5000	5000	6000	6000-10000	6000-10000	6000-10000
防水等级IP Rate	IP65					
刷新率Refresh Rate(Hz)	3840-7680					
箱体重量Cabinet Weight (kg)	28	24.6	24.6	24.6	24.6	24.6
箱体材料Cabinet Material	iron					
灰度Grayscale	14-16Bit					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V160°/H160°					
最佳视距Best Viewing Distance(m)	>3	>4	>4.8	>6.2	>7.8	>10.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大/平均功耗Max./Avg. power consumption(w)	200-300/780					
适用标准Cert.	CCC/CE/RoHS/FCC					
储存温度湿度Storage Temperature&Humidity(RH)	-20~60℃/10%~85%					
寿命Life Span(h)	> 100,000					

FLEXIBLE LED SCREEN

柔性LED屏


FF SERIES

Customizable







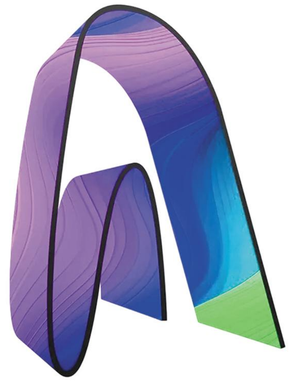

产品特点
PRODUCT FEATURES

强柔韧性
High Flexibility

快速安装
Quick Installation

高亮度
High Brightness

广视角
Wide Viewing Angle

高对比度
High Contrast

磁吸安装
Magnetic Mounting

超高清
Ultra HD

高刷新率
High Refresh Rate

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.86	P2	P2.5	P3.076	P4
模组尺寸Module Size(mm)	320x160						
模组分辨率Module Resolution(dot)	256x128	208x104	172x86	160x80	128x64	64x64	64x32
扫描Scanning(s)	1/64	1/52	1/43	1/40	1/32	1/32	1/16
封装方式Encapsulation	SMD/GOB						
维护方式Maintenance	Front						
安装方式Installation	Front/Rear						
箱体尺寸Cabinet Size(mm)	Customizable						
每平方像素点Density(dot/㎡)	640000	422760	288369	250000	160000	105625	62500
亮度Brightness(cd/㎡)	500-700/5000-6000						
防水等级IP Rate	IP31	IP31	IP31	IP31	IP31/IP65	IP31/IP65	IP31/IP65
刷新率Refresh Rate(Hz)	3840-7680						
箱体重量Cabinet Weight (kg)	Customizable						
箱体材料Cabinet Material	Iron						
灰度Grayscale	14-16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.8	>2	>2.5	>3	>4
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	600-1000/200-350						
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%						
寿命Life Span(h)	> 100,000						

STAGE RENTAL SCREEN SERIES

舞台租赁屏系列

Indoor/Outdoor

采用模块化设计快速拆装，高适应性可灵活拼接，专为短期活动提供高效视觉解决方案。

With a modular design for quick assembly and disassembly, and high adaptability for flexible splicing, it provides an efficient visual solution specifically for short-term events.










STAGE RENTAL LED SCREEN

舞台租赁屏

RA SERIES

500x500mm/500x1000mm

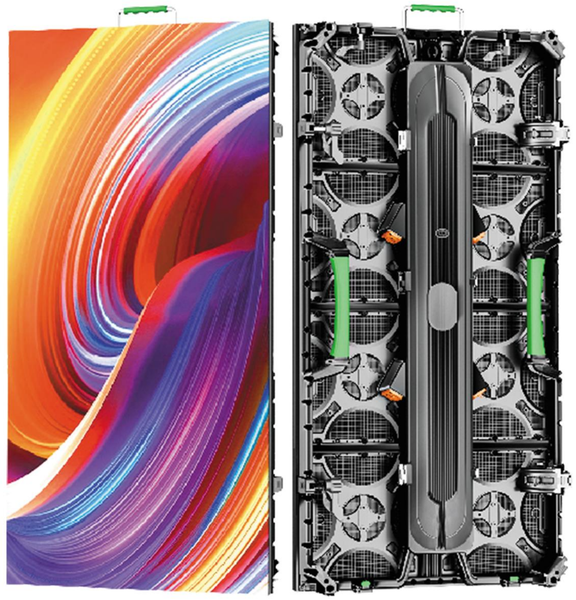




Ordinary



45°Angle Design Options

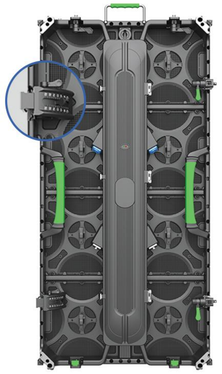

Curved Design Option

产品特点
PRODUCT FEATURES

IP65防水等级
IP65 Waterproof Rating

高对比度
High Contrast

前后维护
Front Rear Maintenance

广视角
Wide Viewing Angle

无缝拼接
Seamless Splicing

寿命长
Long Lifespan

高亮度
High Brightness

高刷新率
High Refresh Rate

产品参数/PRODUCT PARAMETERS

型号Model	P1.56	P1.953	P2.604	P2.976	P3.91
模组尺寸Module Size(mm)			250x250		
模组分辨率Module Resolution(dot)	160x160	128x128	96x96	84x84	64x64
扫描Scanning(s)	1/40	1/32	1/32	1/21	1/16
封装方式Encapsulation	SMD/GOB				
维护方式Maintenance	Front/Rear				
安装方式Installation	Hanging/Floor Support				
箱体尺寸Cabinet Size(mm)	500x500/500x1000				
每平方像素点Density(dot/㎡)	409600	262144	147456	112896	65536
亮度Brightness(cd/㎡)	600-1000	800-1200	800-1200 4000-5500	800-1200 4000-5500	800-1200 4000-5500
防水等级IP Rate	IP31	IP31	IP31/IP65	IP31/IP65	IP31/IP65
刷新率Refresh Rate(Hz)	3840-7680				
箱体重量Cabinet Weight (kg)	7.5/12.5				
箱体材料Cabinet Material	Die-casting aluminum				
灰度Grayscale	14-16Bit				
换帧频率Frame Change Frequency(Hz)	50/60				
视角Viewing Angle(V/H)	V160°/H160°				
最佳视距Best Viewing Distance(m)	>1.5	>2	>2.6	>3	>4
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%				
最大/平均功耗Max./Avg. power consumption(w)	600/225				
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%				
寿命Life Span(h)	> 100,000				

STAGE RENTAL LED SCREEN


舞台租赁屏

RB SERIES

500x500mm/500x1000mm








Ordinary



45°Angle Design Options

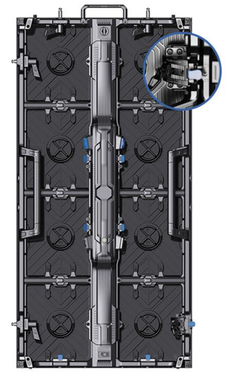

Curved Design Option

产品特点
PRODUCT FEATURES

无缝拼接
Seamless Splicing

前后维护
Front Rear Maintenance

高亮度
High Brightness

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

直角安装
Right-Angle Installation

双重备份信号电源
Dual Backup
Signal Oower Supply

IP65防水等级
IP65 Waterproof Rating

产品参数/PRODUCT PARAMETERS

型号Model	P1.56	P1.953	P2.604	P2.976	P3.91
模组尺寸Module Size(mm)			250x250		
模组分辨率Module Resolution(dot)	160x160	128x128	96x96	84x84	64x64
扫描Scanning(s)	1/40	1/32	1/32	1/21	1/16
封装方式Encapsulation	SMD/GOB				
维护方式Maintenance	Front/Rear				
安装方式Installation	Hanging/Floor Support				
箱体尺寸Cabinet Size(mm)	500x500/500x1000				
每平方像素点Density(dot/㎡)	409600	262144	147456	112896	65536
亮度Brightness(cd/㎡)	600-1000	800-1200	800-1200 4000-5500	800-1200 4000-5500	800-1200 4000-5500
防水等级IP Rate	IP31	IP31	IP31/IP65	IP31/IP65	IP31/IP65
刷新率Refresh Rate(Hz)	3840-7680				
箱体重量Cabinet Weight (kg)	7.5/12.5				
箱体材料Cabinet Material	Die-casting aluminum				
灰度Grayscale	14-16Bit				
换帧频率Frame Change Frequency(Hz)	50/60				
视角Viewing Angle(V/H)	V160°/H160°				
最佳视距Best Viewing Distance(m)	>1.5	>2	>2.6	>3	>4
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%				
最大/平均功耗Max./Avg. power consumption(w)	600/225				
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%				
寿命Life Span(h)	> 100,000				


CURVED RENTAL LED SCREEN

弧形租赁屏


RC SERIES

500X500mm







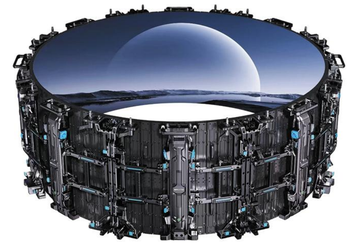

产品特点
PRODUCT FEATURES

无缝拼接
Seamless Splicing

前后维护
Front Rear Maintenance

高亮度
High Brightness

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

可调节弧度
Adjustable Curvature

双重备份信号电源
Dual Backup
Signal Oower Supply

IP65防水等级
IP65 Waterproof Rating

产品参数/PRODUCT PARAMETERS

型号Model	P2.604	P2.976	P3.91
模组尺寸Module Size(mm)		250x250	
分辨率Resolution(dot)	192x192	168x168	128x128
扫描Scanning(s)	1/32	1/28-1/21	1/16
封装方式Encapsulation		SMD/GOB	
维护方式Maintenance		Front	
安装方式Installation		Front/Rear	
箱体尺寸Cabinet Size(mm)		500x500	
每平方像素点Density(dot/㎡)	147456	112896	65536
亮度Brightness(cd/㎡)		500-700/5000-6000	
防水等级IP Rate	IP31	IP31/IP65	IP31/IP65
刷新率Refresh Rate(Hz)		3840-7680	
箱体重量Cabinet Weight (kg)		7.5	
箱体材料Cabinet Material		Die-casting aluminum	
灰度Grayscale		14-16Bit	
换帧频率Frame Change Frequency(Hz)		50/60	
视角Viewing Angle(V/H)		V160°/H160°	
最佳视距Best Viewing Distance(m)	>2.6	>3	>4
输入电压Input Voltage(V)		AC110V±15%/AC220V±15%	
最大/平均功耗Max./Avg. power consumption(w)		600/200-350	
储存温度湿度Storage Temperature&Humidity(RH)		- 20℃ ~ 60℃/20% ~ 90%	
寿命Life Span(h)		> 100,000	

STAGE RENTAL LED SCREEN

舞台租赁屏

RD SERIES

960x960mm



产品特点
PRODUCT FEATURES

无缝拼接
Seamless Splicing

前后维护
Front Rear Maintenance

高亮度
High Brightness

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

寿命长
Long Lifespan

卓越防护
Superior Protection

IP65防水等级
IP65 Waterproof Rating





产品参数/PRODUCT PARAMETERS


型号Model	P2.5	P3.076	P4	P5	P6.67	P8	P10
模组尺寸Module Size(mm)	320x160						
模组分辨率Module Resolution(dot)	160x80	104x52	80x40	64x32	48x24	40x20	32x16
扫描Scanning(s)	1/16	1/13	1/10	1/8	1/6	1/5	1/4/2
封装方式Encapsulation	SMD/GOB						
维护方式Maintenance	Front/Rear						
安装方式Installation	Hanging/Stacking						
箱体尺寸Cabinet Size(mm)	960x960						
每平方像素点Density(dot/㎡)	160000	105625	62500	40000	22478	15625	10000
亮度Brightness(cd/㎡)	4500-5000	5000-6000	5000-6000	5000-6000	5000-6000	4000-5000	3500-4200 6000-7000
防水等级IP Rate	IP31	IP31/IP65	IP31/IP65	IP31/IP65	IP65	IP65	IP65
刷新率Refresh Rate(Hz)	3840-7680						
箱体重量Cabinet Weight (kg)	30						
箱体材料Cabinet Material	Die-casting aluminum						
灰度Grayscale	14-16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>2.5	>3	>4	>5	>6.7	>8	>10
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	600/200-300						
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%						
寿命Life Span(h)	> 100,000						

STAGE RENTAL LED SCREEN

舞台租赁屏

RE SERIES

576X576mm/640X640mm

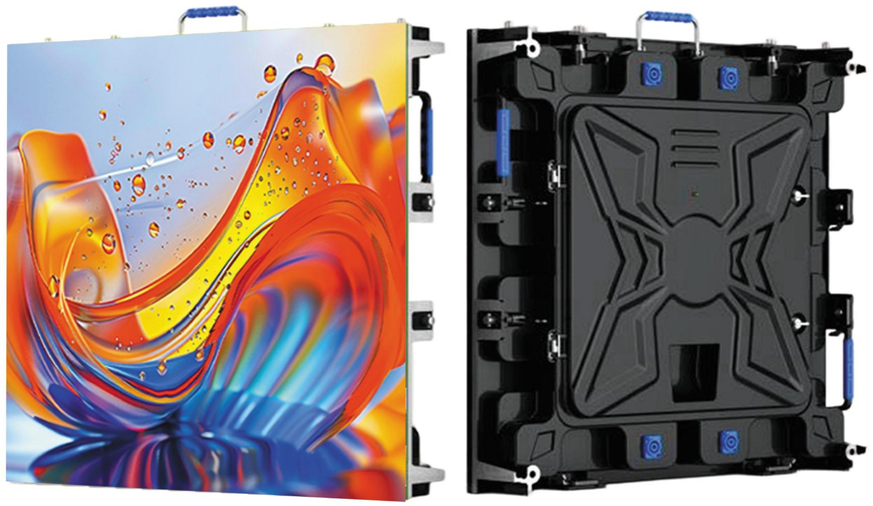



640x640mm



576x576mm

产品特点
PRODUCT FEATURES

无缝拼接
Seamless Splicing

前维护
Front Maintenance

高亮度
High Brightness

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

寿命长
Long Lifespan

卓越防护
Superior Protection

IP65防水等级
IP65 Waterproof Rating

产品参数/PRODUCT PARAMETERS

型号Model	P1.86	P2	P2.5	P3	P4	P5	P6
模组尺寸Module Size(mm)	320x160	320x160	320x160	192x192	320x160	320x160	192x192
模组分辨率Module Resolution(dot)	172x86	160x80	128x64	64X64	80x40	64x32	32x32
扫描Scanning(s)	1/43	1/40	1/32/16	1/32/16	1/20/10	1/16/8	1/8
封装方式Encapsulation	1515RGB	1515RGB	SMD1415	SMD1921	SMD1921	SMD2727	SMD2727
维护方式Maintenance	Front	Front	Front	Front	Rear	Rear	Rear
安装方式Installation	Front/Rear						
箱体尺寸Cabinet Size(mm)	640x640	640x640	640x640	576x576	640x640	640x640	576x576
每平方像素点Density(dot/㎡)	288369	250000	160000	111111	62500	40000	27777
亮度Brightness(cd/㎡)	700-1000	700-1000	700-1000 4500-5000	700-1000 4500-5000	700-1000 5000-6000	700-1000 5000-6000	700-1000 4800-6000
防水等级IP Rate	IP31	IP31	IP31/IP65	IP31/IP65	IP31/IP65	IP31/IP65	IP65
刷新率Refresh Rate(Hz)	3840-7680						
箱体重量Cabinet Weight (kg)	13	13	13	10	26	26	10
箱体材料Cabinet Material	Die-casting aluminum						
灰度Grayscale	14-16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V160°/H160°						
最佳视距Best Viewing Distance(m)	>1.8	>2	>2.5	>3	>4	>5	>6
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%						
最大/平均功耗Max./Avg. power consumption(w)	600/200	600/200	600/200	1000/350	900/300	800/400	800/300
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%						
寿命Life Span(h)	> 100,000						

INDOOR HD SCREEN SERIES

室内高清屏系列

SMD/COB/GOB

超清细腻画质，无缝拼接无边框，视觉体验一体化，动态画面流畅无拖影。

Ultra-high definition and delicate picture quality, seamless splicing and borderless design, integrated visual experience, smooth dynamic images without ghosting.










INDOOR HD LED SCREEN


室内高清屏

HA/HB SERIES

Soft Connect / Hard Connect
SMD/GOB



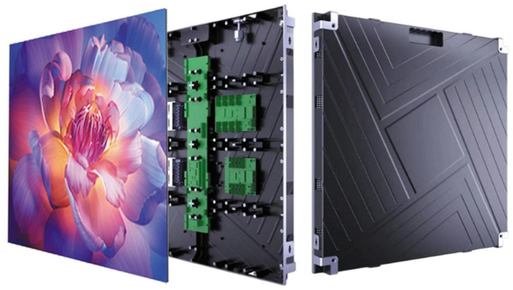

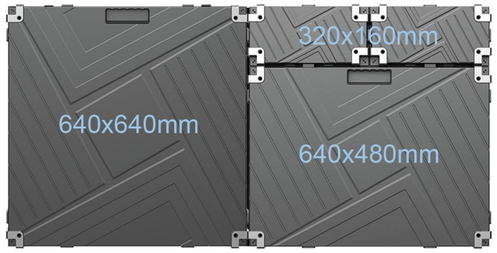

产品特点
PRODUCT FEATURES

无缝拼接
Seamless Splicing

前维护
Front Maintenance

高稳定性
High-Stability

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

高清
High Definition

简约结构
Simple Structure

高对比度
High Contrast

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.86	P1.875	P2	P2.5
模组尺寸Module Size(mm)	320x160	320x160	320x160	300x168.75	320x160	320x160
模组分辨率Module Resolution(dot)	256x128	208x104	172x86	160x90	160x80	128X64
扫描Scanning(s)	1/64/45	1/52	1/43	1/45	1/40	1/32
封装方式Encapsulation	GOB	GOB	GOB	GOB	SMD	SMD
维护方式Maintenance	Front					
安装方式Installation	Front/Rear					
箱体尺寸Cabinet Size(mm)	640x480/640x640/Customizable					
每平方像素点Density(dot/㎡)	640000	422500	288369	284444	250000	160000
亮度Brightness(cd/㎡)	600/800/1000/1200					
防水等级IP Rate	IP31					
刷新率Refresh Rate(Hz)	3840					
箱体重量Cabinet Weight (kg)	4/9					
箱体材料Cabinet Material	Die-casting aluminum					
灰度Grayscale	14-16Bit					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V160°/H160°					
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.8	>1.9	>2	>2.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大/平均功耗Max./Avg. power consumption(w)	600/200					
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/20% ~ 90%					
寿命Life Span(h)	> 100,000					

INDOOR HD LED SCREEN

室内高清屏


HC SERIES

600x337.5mm









产品特点
PRODUCT FEATURES

高精度
High Accuracy

前维护
Front Maintenance

轻薄
Lightweight And Thin

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

低功耗
Low Power Consumption

集成设计
Integrated Design

高对比度
High Contrast

产品参数/PRODUCT PARAMETERS

型号Model	P0.62	P0.78	P0.93	P1.25	P1.56	P1.87
模组尺寸Module Size(mm)	150x168.75					
模组分辨率Module Resolution(dot)	242x272	192x216	160x180	120x135	96x108	80x90
封装方式Encapsulation	COB					
维护方式Maintenance	Front Service					
安装方式Installation	Front					
箱体尺寸Cabinet Size(mm)	600x337.5x39.5					
每平方像素点Density(dot/㎡)	2560000	1638400	1137777	640000	409600	284444
亮度Brightness(cd/㎡)	600-1200					
防水等级IP Rate	IP54 (Washable by clean water)					
刷新率Refresh Rate(Hz)	3840					
箱体重量Cabinet Weight (kg)	4					
箱体材料Cabinet Material	Die-casting Aluminium					
灰度Grayscale	14-16Bit					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V160°/H160°					
最佳视距Best Viewing Distance(m)	>0.6	>0.8	>0.9	>1	>1.5	>2
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大功耗Max Power Consumption(w)	170/95	170/85	150/75	140/70	140/70	130/65
电路设计Circuit Design	Options: Common Cathode Circuit/Common Anode Circuit					
储存温度湿度Storage Temperature&Humidity(RH)	-20°C-+40°C/20% ~ 90%					
寿命Life Span(h)	> 100,000					

INDOOR HD LED SCREEN

室内高清屏

HD SERIES


640x480mm









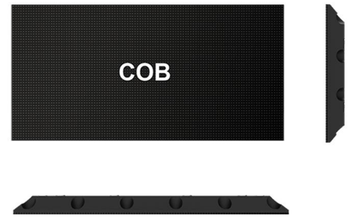

产品特点
PRODUCT FEATURES

- IP54防水等级 IP54 Waterproof Rating
- 前维护 Front Maintenance
- 模组通用孔位 Universal Module Hole Positions
- 广视角 Wide Viewing Angle
- 高刷新率 High Refresh Rate
- 无缝拼接 Seamless Splicing
- 支持备份 Supports Backup
- 高对比度 High Contrast

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.86
模组尺寸Module Size(mm)		320x160	
模组分辨率Module Resolution(dot)	256x128	208x104	172x86
LED芯片LED Chip		Flip Chip	
封装方式Encapsulation		COB	
维护方式Maintenance		Front Service	
安装方式Installation		Front	
箱体尺寸Cabinet Size(mm)		640x480x59	
每平方像素点Density(dot/㎡)	640000	422500	288906
亮度Brightness(cd/㎡)		600	
防水等级IP Rate		IP54 (Washable by clean water)	
刷新率Refresh Rate(Hz)		3840	
箱体重量Cabinet Weight (kg)		7.5	
箱体材料Cabinet Material		Die-casting Aluminium	
灰度Grayscale		14-16Bit	
换帧频率Frame Change Frequency(Hz)		50/60	
视角Viewing Angle(V/H)		V160°/H160°	
最佳视距Best Viewing Distance(m)	>1	>1.5	>2
输入电压Input Voltage(V)		AC110V±15%/AC220V±15%	
最大/平均功耗Max./Avg. power consumption(w)		600/200	
电路设计Circuit Design		Common Anode Circuit	
储存温度湿度Storage Temperature&Humidity(RH)		-20°C-+60°C/20% ~ 90%	
寿命Life Span(h)		> 100,000	

SMART ALL-IN-ONE MACHINE
智能一体机
HE SERIES

108” /135” /162”



产品特点
PRODUCT FEATURES

智能白板
Smart Whiteboard

触屏功能
Touchscreen Functionality

视频会议
Video Conference

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

高清
High Definition

智能控制
Smart Control

高对比度
High Contrast





Manually Operated
Lift-up Folding TV



Semi/Fully Electric
Lift-up Folding TV

产品参数/PRODUCT PARAMETERS

型号Model	108”	135”	162”
点间距Pixel Pitch(mm)	P1.25	P1.56	P1.875
屏幕分辨率Screen Resolution(dots)	1920x1080(other sizes and resolutions available)		
LED类型LED Type	Flip Chip		
边框材质Frame Material	Aluminium		
屏幕尺寸Screen Size(mm)	2400x1350	3000x1687.5	3600x2025
整屏重量Screen Weight	135	195	260
亮度Brightness(nit)	600	600	550
灰度等级Grayscale Level(bit)	22	18	18
防水等级IP Rate	IP54(Cleanable by wet cloth)/ IP30(Back)		
维护方式Maintenance Method	Front		
刷新率Refresh Rate(hz)	3840		
视角Viewing Angle(V/H)	V160°/H160°		
内置系统Built-in System	Android/Windows Double System (optional)		
Windows系统配置Windows System Configuration	15 CPU+8G Memory+128G SSD		
触控技术Touch Technology	Infrared Touch		
响应时间Response Time(ms)	≤20ms		
支持的终端设备Supported Terminals	Android Phone, iPhone, iPad, Windows PC, MAC, etc.		
多屏同步传输Multi-Screen Synchronous Transmission	9 Split Screens		
强电源电压Strong Power Supply Voltage	AC110V±15%/AC220V±15%		
最大/平均功耗Max./Avg. power consumption(w)	1300/400	2000/600	2700/800
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 60℃/10% ~ 75%		
寿命Life Span(h)	> 100,000		

FOLDABLE LED SCREEN

折叠一体屏

HF SERIES

135”/162”





产品特点
PRODUCT FEATURES

可升降折叠
Liftable And Foldable

前维护
Front Maintenance

节能
Energy Conservation

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

高清
High Definition

遥控
Remote Control

无色差
No Color Deviation







产品参数/PRODUCT PARAMETERS

显示尺寸Display Size(mm)	135”/3020x1687.5		162”/3620x2025	
型号Model	P0.78	P0.9375	P1.25	P1.5625
模组尺寸Module Size(mm)	150x168.75			
模组分辨率Module Resolution(dot)	205x230	160x180	120x135	90x108
箱体分辨率Cabinet Resolution(dot)	820x460	640x360	480x270	384x216
维护方式Maintenance	Front			
安装方式Installation	Front/Rear			
箱体尺寸Cabinet Size(mm)	600x337.5x29			
每平方像素点Density(dot/㎡)	1508800	1137777	640000	409600
亮度Brightness(cd/㎡)	600-1200			
防水等级IP Rate	IP65			
刷新率Refresh Rate(Hz)	3840-7680			
箱体重量Cabinet Weight (kg)	3.8			
箱体材料Cabinet Material	Die-casting aluminum			
灰度Grayscale	14-16Bit			
换帧频率Frame Change Frequency(Hz)	50/60			
视角Viewing Angle(V/H)	V170°/H170°			
最佳视距Best Viewing Distance(m)	>0.8	>0.9	>1.3	>1.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%			
最大/平均功耗Max./Avg. power consumption(w)	≤450/≤200			
色温Color Temperature(k)	3000-10000 adjustable			
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 40℃/10% ~ 90%			
寿命Life Span(h)	> 100,000			

IMMERSIVE LED SCREEN

沉浸式LED显示屏

HXR SERIES

Customizable





Three sides



Four sides



Five sides

产品特点
PRODUCT FEATURES

无失真
No Distortion

前维护
Front Maintenance

无折痕
No Creases

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

高清
High Definition

自然过渡
Natural Transition

无色差
No Color Deviation

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.5625	P1.86	P2	P2.5
模组尺寸Module Size(mm)	320x160					
模组分辨率Module Resolution(dot)	256x128	208x104	205x103	172x86	160x80	128x64
扫描Scanning(s)	1/64	1/52	1/51	1/43	1/40	1/32
封装方式Encapsulation	SMD/GOB					
维护方式Maintenance	Front					
安装方式Installation	Front/Rear					
箱体尺寸Cabinet Size(mm)	Customizable					
每平方像素点Density(dot/㎡)	640000	422500	406406	288369	250000	160000
亮度Brightness(cd/㎡)	600-1000/5000-6000					
防水等级IP Rate	IP43					
刷新率Refresh Rate(Hz)	3840					
箱体重量Cabinet Weight (kg)	18kg/sqm/40kg/sqm					
箱体材料Cabinet Material	Iron					
灰度Grayscale	14-16Bit					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V160°/H160°					
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.5	>1.8	>2	>2.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大/平均功耗Max./Avg. power consumption(w)	600-1000/200-350					
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%					
寿命Life Span(h)	> 100,000					

ADVERTISING MACHINE SERIES

广告机系列

Customizable

支持多台无缝拼接，尺寸自由组合，突破传统屏幕的尺寸限制。

It supports seamless splicing of multiple units, allowing for flexible size combinations and breaking through the size limitations of traditional screens.









INDOOR POSTER LED SCREEN

室内海报屏

PA/PB SERIES

640X1920mm/960x1920mm





PA SERIES



PB SERIES

产品特点
PRODUCT FEATURES

无线网络/局域网在线传输
WiFi/LAN Online Transmission

远程遥控
Remote Control

可折叠设计
Foldable Design

方便移动
Convenient To Move

USB闪存盘即插即用
USB Flash Drive Plug And Play

智能分屏
Smart Split Screen

HDMI输入
HDMI Input

拼接显示
Spliced Display

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.86	P2	P2.5
模组尺寸Module Size(mm)			320x160		
模组分辨率Module Resolution(dot)	256x128	208x104	172x86	160x80	128x64
扫描Scanning(s)	1/64	1/52	1/43	1/40	1/32
封装方式Encapsulation	SMD/GOB				
维护方式Maintenance	Front				
安装方式Installation	Front				
箱体尺寸Cabinet Size(mm)	640x1920/960x1920				
每平方像素点Density(dot/㎡)	640000	422500	288369	250000	160000
亮度Brightness(cd/㎡)	800/1000/1200				
防水等级IP Rate	IP31				
刷新率Refresh Rate(Hz)	3840				
箱体重量Cabinet Weight (kg)	45				
箱体材料Cabinet Material	Iron/Aluminum				
灰度Grayscale	14-16Bit				
换帧频率Frame Change Frequency(Hz)	50/60				
视角Viewing Angle(V/H)	V160°/H160°				
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.8	>2	>2.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%				
最大/平均功耗Max./Avg. power consumption(w)	800/400				
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%				
寿命Life Span(h)	> 100,000				

TRIPLE-FOLD POSTER LED SCREEN

三折叠海报屏

PC/PD SERIES

1280x1920mm





PC SERIES



PD SERIES

产品特点
PRODUCT FEATURES

无线网络/局域网在线传输
WiFi/LAN Online Transmission

远程遥控
Remote Control

可折叠设计
Foldable Design

方便移动
Convenient To Move

USB闪存盘即插即用
USB Flash Drive Plug And Play

智能分屏
Smart Split Screen

HDMI输入
HDMI Input

拼接显示
Spliced Display

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.86	P2	P2.5
模组尺寸Module Size(mm)			320x160		
模组分辨率Module Resolution(dot)	256x128	208x104	172x86	160x80	128x64
扫描Scanning(s)	1/64	1/52	1/43	1/40	1/32
封装方式Encapsulation			GOB		
维护方式Maintenance			Front/Rear		
安装方式Installation			Front		
箱体尺寸Cabinet Size(mm)			1280x1920		
每平方像素点Density(dot/㎡)	640000	422500	288369	250000	160000
亮度Brightness(cd/㎡)			800/1000/1200		
防水等级IP Rate			IP31		
刷新率Refresh Rate(Hz)			3840		
箱体重量Cabinet Weight (kg)			85		
箱体材料Cabinet Material			Iron/Aluminum		
灰度Grayscale			14-16Bit		
换帧频率Frame Change Frequency(Hz)			50/60		
视角Viewing Angle(V/H)			V160°/H160°		
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.8	>2	>2.5
输入电压Input Voltage(V)			AC110V±15%/AC220V±15%		
最大/平均功耗Max./Avg. power consumption(w)			1200/540		
储存温度湿度Storage Temperature&Humidity(RH)			- 20℃ ~ 60℃/20% ~ 90%		
寿命Life Span(h)			> 100,000		

OUTDOOR POSTER LED SCREEN

户外海报屏

PE/PF/PG SERIES

640x1920mm/1280x1920mm



产品特点
PRODUCT FEATURES

无线网络/局域网在线传输
WiFi/LAN Online Transmission

远程遥控
Remote Control

可折叠设计
Foldable Design

方便移动
Convenient To Move

USB闪存盘即插即用
USB Flash Drive Plug And Play

智能分屏
Smart Split Screen

HDMI输入
HDMI Input

拼接显示
Spliced Display



PE SERIES



PF SERIES



PG SERIES

产品参数/PRODUCT PARAMETERS

型号Model	P2.5	P3.076	P4	P5
模组尺寸Module Size(mm)	320x160			
模组分辨率Module Resolution(dot)	128x64	104x52	80x40	64x32
扫描Scanning(s)	1/16	1/13	1/10	1/8
封装方式Encapsulation	SMD1415	SMD1415	SMD1921	SMD1921
维护方式Maintenance	Rear			
安装方式Installation	Rear			
箱体尺寸Cabinet Size(mm)	640x1920/1280x1920			
每平方像素点Density(dot/㎡)	160000	105625	62500	40000
亮度Brightness(cd/㎡)	4500-5000	5000-6000	5000-6000	5000-6000
防水等级IP Rate	IP65			
刷新率Refresh Rate(Hz)	3840-7680			
箱体重量Cabinet Weight (kg)	50			
箱体材料Cabinet Material	Iron/Aluminum			
灰度Grayscale	14-16Bit			
换帧频率Frame Change Frequency(Hz)	50/60			
视角Viewing Angle(V/H)	V160°/H160°			
最佳视距Best Viewing Distance(m)	>2.5	>3	>4	>5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%			
最大/平均功耗Max./Avg. power consumption(w)	1000/500			
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%			
寿命Life Span(h)	> 100,000			

PF产品效果 /PF PRODUCT EFFECTS











PG产品效果 /PG PRODUCT EFFECTS













PH SERIES



PI SERIES

产品参数/PRODUCT PARAMETERS

型号Model	P2.5	P3.076	P4	P5
模组尺寸Module Size(mm)	320x160			
模组分辨率Module Resolution(dot)	128x64	104x52	80x40	64x32
扫描Scanning(s)	1/16	1/13	1/10	1/8
封装方式Encapsulation	SMD1415	SMD1415	SMD1921	SMD1921
维护方式Maintenance	Rear			
安装方式Installation	Rear			
箱体尺寸Cabinet Size(mm)	Customizable			
每平方像素点Density(dot/㎡)	160000	105625	62500	40000
亮度Brightness(cd/㎡)	4500-5000	5000-6000	5000-6000	5000-6000
防水等级IP Rate	IP65			
刷新率Refresh Rate(Hz)	3840-7680			
箱体重量Cabinet Weight (kg)	50			
箱体材料Cabinet Material	Iron			
灰度Grayscale	14-16Bit			
换帧频率Frame Change Frequency(Hz)	50/60			
视角Viewing Angle(V/H)	V160°/H160°			
最佳视距Best Viewing Distance(m)	>2.5	>3	>4	>5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%			
最大/平均功耗Max./Avg. power consumption(w)	800/225			
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%			
寿命Life Span(h)	> 100,000			

OUTDOOR TRAILER LED SCREEN

户外拖车屏

PZ SERIES

Customizable



产品特点
PRODUCT FEATURES

高度可调
Adjustable Height

灵活移动
Flexible Move

屏幕可旋转
The Screen Can Rotate

一体化设计
Integrated design

高刷新率
High Refresh Rate

广视角
Wide Viewing Angle

高亮度
High Brightness

安全设计
Safe Design

产品效果/PRODUCT EFFECTS



产品参数/PRODUCT PARAMETERS

型号Model	P3	P4	P5
整车尺寸Vehicle Dimensions(mm)	2525x1800x2145/2934x1800x2490/5070x1900x2050/5590x1900x2085		
屏幕尺寸Screen Size(mm)	2240x1280/2560x1600/3200x1920/3840x2240		
模组尺寸Module Size(mm)	320x160		
升降系统Lifting System	The lifting range is 1000mm the screen can rotate 330°		
制动方式Braking Method	Collision braking/Electric braking/Handbrake		
总重量Total weight (kg)	535/610/1500/1750		
灰度Grayscale	14-16Bit		
多媒体系统Multimedia System	Equipped with a multimedia playback system 4G connectivity/USB drive playback/Supports mainstream video formats		
刷新率Refresh Rate(hz)	3840-7680		
换帧频率Frame Change Frequency(hz)	50/60		
视角Viewing Angle(V/H)	V160°/H160°		
供电系统Power Supply System	Generator power supply/External power supply 220V/28A		
货柜Container	20GP		
包装Packaging	Containerized truckload shipping (bare load) Containerized loading and unloading shipping		

TRANSPARENT SCREEN SERIES


透明屏系列

Indoor/Outdoor

透明LED屏幕是一种创新的视觉解决方案，将窗户或建筑转变为数字标牌屏幕，无需遮挡即可展示广告。

Transparent LED screens are an innovative visual solution that transforms windows or buildings into digital signage displays, allowing for the display of advertisements without obstructing the view.



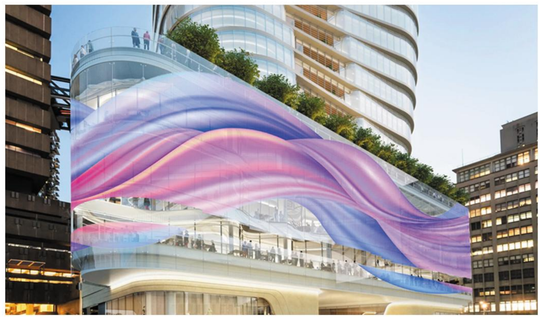






INDOOR TRANSPARENT LED SCREEN


室内透明屏

TA SERIES

1000x500mm/1000X1000mm

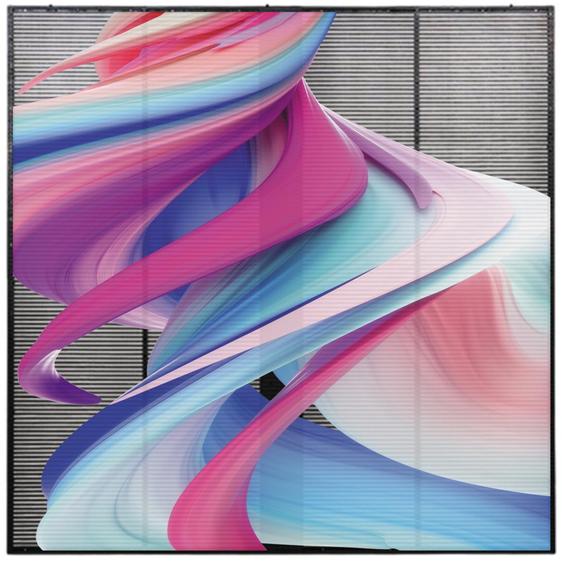







产品特点
PRODUCT FEATURES

每平方米7公斤
7Kg Per Sqm

高透明度
High Transparency

高对比度
High Contrast

快速维护
Quick Maintenance

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

高亮度
High Brightness

无缝拼接
Seamless Splicing

产品参数/PRODUCT PARAMETERS

型号Model	P2.6-5.2	P2.8-5.6	P3.91-7.81	P3.91-7.81	P10.4
模组尺寸Module Size(mm)			500x125		
模组分辨率Module Resolution(dot)	384X192	352X176	256X128	256x128	96x96
扫描Scanning(s)	1/12	1/11	1/8-16-32	1/7	1/2
封装方式Encapsulation	SMD	SMD	SMD	SMD	SMD
维护方式Maintenance			Front/Rear		
通透率Transparent Rate	55%	58%	62%	68%	75%
箱体尺寸Cabinet Size(mm)			1000X500/1000x1000		
每平方像素点Density(dot/㎡)	73728	61952	32768	32256	9216
亮度Brightness(cd/㎡)	650-800 3000-4000	800-1200 3500/4200	1500/2500/4500	4800-5500	4000-4500
防水等级IP Rate			IP31		
刷新率Refresh Rate(Hz)			3840		
箱体重量Cabinet Weight (kg)	8	8	7.5	7.5	7.5
箱体材料Cabinet Material			Aluminum		
灰度Grayscale			14-16Bit		
换帧频率Frame Change Frequency(Hz)			50/60		
视角Viewing Angle(V/H)			V160°/H160°		
最佳视距Best Viewing Distance(m)	>2.5	>3	>4	>4	>10
输入电压Input Voltage(V)			AC110V±15%/AC220V±15%		
最大/平均功耗Max./Avg. power consumption(w)	600/300	600/300	400-600/200-300	400-600/200-300	600/250
储存温度湿度Storage Temperature&Humidity(RH)			- 10℃ ~ 60℃/10% ~ 90%		
寿命Life Span(h)			> 100,000		

OUTDOOR TRANSPARENT LED SCREEN

户外透明屏

TB SERIES

1000x500mm





产品特点
PRODUCT FEATURES

轻量化设计
Lightweight Design

防水
Water Proof

快速锁定设计
Quick-Lock Design

快速维护
Quick Maintenance

高防护
High Protection

高刷新率
High Refresh Rate

高亮度
High Brightness

自然散热
Natural Heat Dissipation

产品参数/PRODUCT PARAMETERS

型号Model	P3.91-7.81	P7.81-7.81	P5.2-10.42	P10.42-10.42	P15.625-15.625	P31.25-31.25
模组尺寸Module Size(mm)	500x125					
模组分辨率Module Resolution(dot)	128x16	64x16	96x12	48x12	32x8	16x4
扫描Scanning(s)	1/8	1/8	1/4	1/2	1/1	1/1
封装方式Encapsulation	SMD					
维护方式Maintenance	Front/Rear					
通透率Transparent Rate	62%	70%	72%	75%	80%	85%
箱体尺寸Cabinet Size(mm)	1000x500					
每平方像素点Density(dot/㎡)	32768	16394	18458	9210	4096	1024
亮度Brightness(cd/㎡)	4000-5000					
防水等级IP Rate	IP65					
刷新率Refresh Rate(Hz)	3840-7680					
箱体重量Cabinet Weight (kg)	9					
箱体材料Cabinet Material	Aluminum					
灰度Grayscale	14-16Bit					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V160°/H160°					
最佳视距Best Viewing Distance(m)	>4	>8	>5	>10	>15	>31
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大/平均功耗Max./Avg. power consumption(w)	800/300					
储存温度湿度Storage Temperature&Humidity(RH)	-30℃ - +50℃/10% ~ 80%					
寿命Life Span(h)	> 100,000					


TRANSPARENT GRILLE LED SCREEN

透明格栅屏

TC SERIES

1000x500mm/1000X1000mm



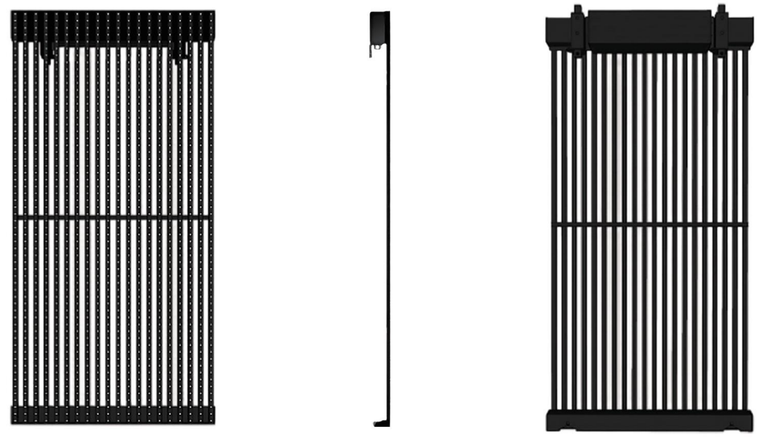

产品特点
PRODUCT FEATURES

轻量化设计
Lightweight Design

节能
Energy Saving

高通透率
High Transparency

易于维护
Easy To Maintain

设置简单
Simple Setup

高刷新率
High Refresh Rate

高亮度
High Brightness

自然散热
Natural Heat Dissipation

产品参数/PRODUCT PARAMETERS


型号Model	PH15-15	PH15-31	PH20-20	PH31-31	PH50-25
箱体分辨率Cabinet Resolution (dot)	32x64	16x64	25x50	16x32	10x40
数据接口Data Interface	DVI/HDMI				
封装方式Encapsulation	DIP/SMD				
维护方式Maintenance	Front/Rear				
通透率Transparent Rate	70%				
箱体尺寸Cabinet Size(mm)	1000x500/1000x1000				
每平方像素点Density(dot/㎡)	4096	2048	2500	1024	800
亮度Brightness(cd/㎡)	6000-8000	6000-8000	5000	4000	2000
防水等级IP Rate	IP65				
刷新率Refresh Rate(Hz)	3840-7680				
箱体重量Cabinet Weight (kg)	8				
灯条材料Strip Materials	Stretched aluminum				
灰度Grayscale	14Bit				
换帧频率Frame Change Frequency(Hz)	60				
视角Viewing Angle(V/H)	V≥60°/H≥110°				
最佳视距Best Viewing Distance(m)	15-500	20-500	20-500	30-500	30-500
输入电压Input Voltage(V)	85-250				
最大/平均功耗Max./Avg. power consumption(w)	800/240				
储存温度湿度Storage Temperature&Humidity(RH)	-40℃~+85℃/10%~90%				
寿命Life Span(h)	≥100,000				


HOLOGRAPHIC INVISIBLE LED SCREEN

全息隐形屏

TD SERIES

1000x250mm/1200x250mm/1500x250mm

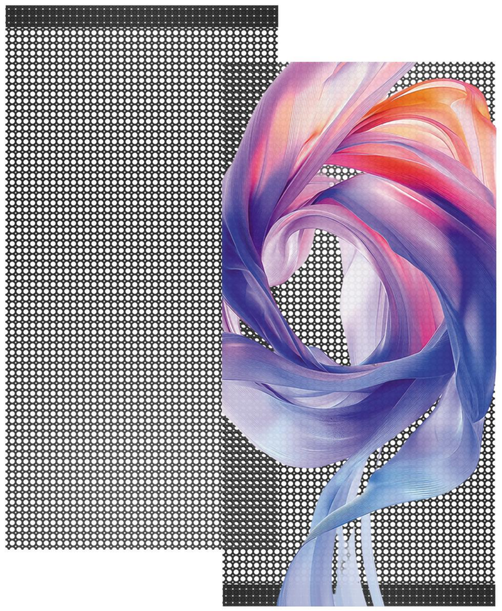

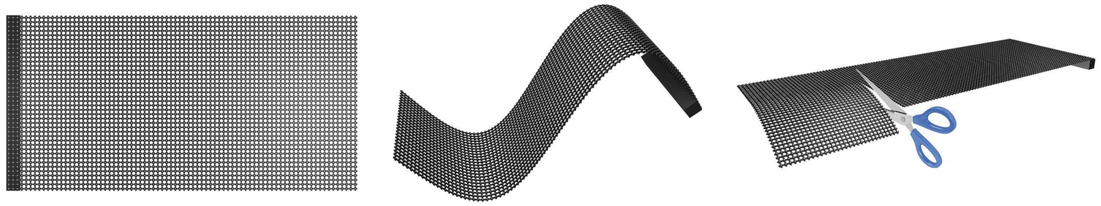

产品特点
PRODUCT FEATURES

轻量化设计
Lightweight Design

可弯曲
Flexible

粘贴安装
Paste Installation

快速维护
Quick Maintenance

可定制
Customizable

高刷新率
High Refresh Rate

可裁剪
Croppable

3D效果
3D Effect

产品参数/PRODUCT PARAMETERS

型号Model	P3.91	P6.25
箱体分辨率Cabinet Resolution (dot)	256x64	192x40
扫描Scanning(s)	1/8	1/8
扫描方法Scanning Method	Static	
安装方式Installation	Fixed/Suspended	
通透率Transparent Rate	80%	85%
箱体尺寸Cabinet Size(mm)	1000×250/1200×250/1500×250	
每平方像素点Density(dot/㎡)	65536	25600
亮度Brightness(cd/㎡)	3000-5000	
防水等级IP Rate	IP23	
刷新率Refresh Rate(Hz)	3840	
箱体重量Cabinet Weight (kg)	4	
灰度Grayscale	14Bit	
换帧频率Frame Change Frequency(Hz)	50/60	
视角Viewing Angle(V/H)	V160°/H160°	
最佳视距Best Viewing Distance(m)	4-100	6-100
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%	
最大/平均功耗Max./Avg. power consumption(w)	≤800/≤360	
储存温度湿度Storage Temperature&Humidity(RH)	-20°C-55°C/10%～90%	
寿命Life Span(h)	> 100,000	


TRANSPARENT FILM LED SCREEN

透明贴膜屏


TE SERIES


960X320mm/960x480mm/1000x400mm




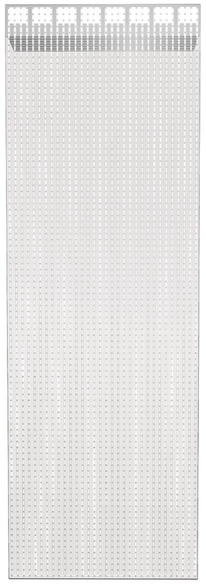




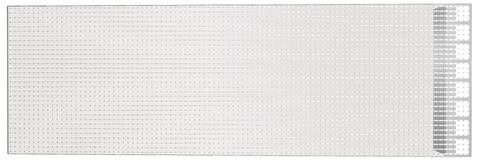







产品特点
PRODUCT FEATURES

可定制
Customizable

超薄设计
Ultra-Thin Design

高通透率
High Transparency

易于维护
Easy To Maintain

可裁剪
Croppable

高刷新率
High Refresh Rate

3D效果
3D Effect

自然散热
Natural Heat Dissipation

产品参数/PRODUCT PARAMETERS


型号Model	P4-8	P6.25	P8	P10	P16	P20
箱体分辨率Cabinet Resolution (dot)	240x40	240x48	120x40	96x32	60x24	48x16
封装方式Encapsulation	SMD2121					
安装方式Installation	Fixed					
通透率Transparent Rate	60%	60%	65%	70%	80%	85%
箱体尺寸Cabinet Size(mm)	960x320 960x480	1000x400	960x320 960x480	960x320 960x480	960x320 960x480	960x320 960x480
每平方像素点Density(dot/㎡)	31250	25600	15625	10000	3096	2500
亮度Brightness(cd/㎡)	600-5000					
防水等级IP Rate	IP23					
刷新率Refresh Rate(Hz)	3840					
箱体重量Cabinet Weight (kg)	2					
电源盒材质Power Box Material	Aluminum extrusions					
灰度Grayscale	16bits					
换帧频率Frame Change Frequency(Hz)	50/60					
视角Viewing Angle(V/H)	V140°/H140°					
最佳视距Best Viewing Distance(m)	>4	>6	>8	>10	>16	>20
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%					
最大/平均功耗Max./Avg. power consumption(w)	800/300	800/300	800/300	800/300	700/260	600/240
储存温度湿度Storage Temperature&Humidity(RH)	-30℃ - +50℃/10% ~ 90%					
寿命Life Span(h)	≥100,000					

CRYSTAL FILM LED SCREEN


晶膜屏

TF SERIES

1000x240mm

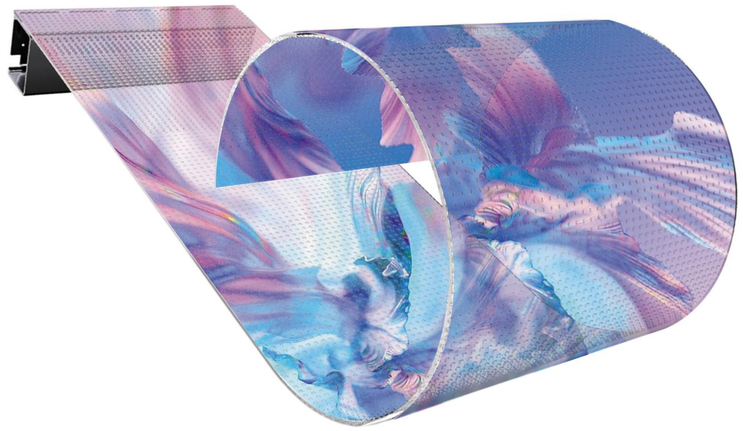



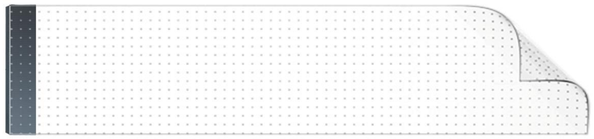



产品特点
PRODUCT FEATURES

- 轻薄 Lightweight
- 可裁剪 Croppable
- 可卷曲 Rollable
- 快速维护 Quick Maintenance
- 高通透率 High Transparency
- 高刷新率 High Refresh Rate
- 高亮度 High Brightness
- 美观安全 Aesthetically Pleasing Safe

产品参数/PRODUCT PARAMETERS

型号Model	P4	P5	P6	P8	P10	P16	P20
箱体尺寸Cabinet Size(mm)	1000x240						
模组分辨率Module Resolution(dot)	250x60	200x48	166x40	125x30	100x24	64x15	50x12
封装方式Encapsulation	SMD1313	SMD1313	SMD2121	SMD2121	SMD2121	SMD2121	SMD2121
输入信号Input Signal	DVI/VGA/Composite Video						
通透率Transparent Rate	85%						
箱体走线方式Case Wiring Method	Internal wiring						
每平方像素点Density(dot/㎡)	62500	40000	27777	15625	1000	3906	2500
亮度Brightness(cd/㎡)	1500	2500	3800	4000	3800	3000	1600
亮度控制等级Brightness Control Levels	0-255levels						
防水等级IP Rate	IP30						
刷新率Refresh Rate(Hz)	≥3840						
箱体重量Cabinet Weight (kg)	≤4.5						
灰度Grayscale	16Bit						
换帧频率Frame Change Frequency(Hz)	50/60						
视角Viewing Angle(V/H)	V140°/H140°						
供电电压Power Supply Voltage(v)	AC 220V±10%(Optional wide voltage range: 110V and 9-36V)						
控屏方式Screen Control Method	Synchronous Box (Computer Screen Control) Asynchronous Box (WiFi Connection for Mobile App/USB Flash Drive Screen Control)						
最大/平均功耗Max./Avg. power consumption(w)	800/240						
温度使用范围Temperature-Operating	-20℃~+50℃						
寿命Life Span(h)	≥100,000						

INTERACTIVE FLOOR SCREEN SERIES

地砖屏系列


IP65 Waterproof

将地面转化为高强度、可实时交互的沉浸式视觉媒介，创造出独特的动态体验。

Transforming the ground into a high-intensity, real-time interactive immersive visual medium, creating a unique and dynamic experience.





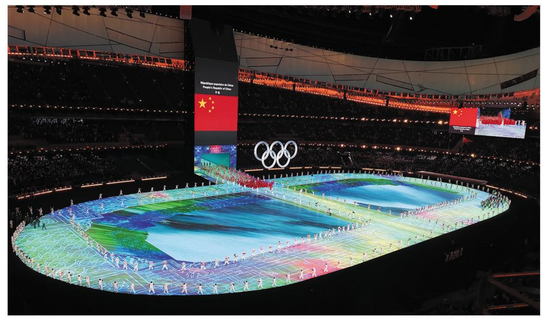



INTERACTIVE FLOOR LED SCREEN

互动地砖屏

DA SERIES

500x500mm/500x1000mm



产品特点
PRODUCT FEATURES

- 2T高承载能力 / 2T High Load Bearing
- 无缝拼接 / Seamless Splicing
- 安全防滑 / Safety Anti-Slip
- 快速安装 / Fast Assembly
- 广视角 / Wide Viewing Angle
- 高刷新率 / High Refresh Rate
- 高亮度 / High Brightness
- 交互式设计 / Interactive Design



DA SERIES



DB SERIES

产品参数/PRODUCT PARAMETERS

型号Model	P2.5	P2.976	P3.91
模组尺寸Module Size(mm)		250x250	
模组分辨率Module Resolution(dot)	100x100	84x84	64x64
扫描Scanning(s)	1/32	1/21	1/16
封装方式Encapsulation	SMD1515	SMD1515	SMD2121
维护方式Maintenance		Front/Rear	
互动方式Interaction Methods		Radar/Bulid-in interactic chip	
箱体尺寸Cabinet Size(mm)		500X500/500x1000	
每平方像素点Density(dot/㎡)	160000	112896	65536
亮度Brightness(cd/㎡)		800-1000/2800-3000	
防水等级IP Rate		IP65	
刷新率Refresh Rate(Hz)		3840-7680	
箱体重量Cabinet Weight (kg)		13/25	
箱体材料Cabinet Material		Iron/Die-cast aluminum	
灰度Grayscale		14-16Bit	
换帧频率Frame Change Frequency(Hz)		50/60	
视角Viewing Angle(V/H)		V160°/H160°	
最佳视距Best Viewing Distance(m)	>2.5	>3	>4
输入电压Input Voltage(V)		AC110V±15%/AC220V±15%	
最大/平均功耗Max./Avg. power consumption(w)		600/200-400	
储存温度湿度Storage Temperature&Humidity(RH)		- 10℃ ~ 60℃/10% ~ 90%	
寿命Life Span(h)		> 100,000	

STADIUM LED SCREEN SERIES

球场屏系列


IP65 Waterproof


采用高亮度、高刷新率的LED技术，即使在强光下也能清晰显示，让观众不错过精彩瞬间。

Employing high-brightness, high-refresh-rate LED technology, it can display clearly even in strong light, ensuring viewers don't miss any exciting moments.





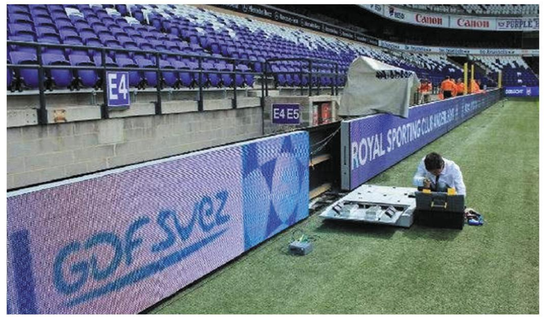

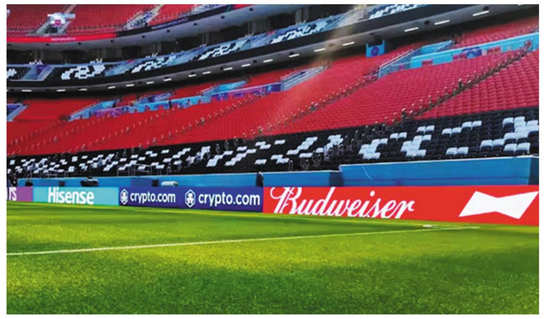

STADIUM LED SCREEN
球场屏
SC SERIES

960x960mm



产品特点
PRODUCT FEATURES

节能
Energy Saving

无缝拼接
Seamless Splicing

安全防护
Safety Protection

IP65 防水等级
IP65 Waterproof Rating

前后维护
Front Rear Maintenance

高刷新率
High Refresh Rate

高亮度
High Brightness

多角度调节
Multi Angle Adjustment



SC SERIES



SA SERIES

产品参数/PRODUCT PARAMETERS

型号Model	P5	P6.67	P8	P10
模组尺寸Module Size(mm)	320x160			
模组分辨率Module Resolution(dot)	64x32	48x24	40x20	32x16
扫描Scanning(s)	1/8	1/6	1/5	1/2
封装方式Encapsulation	SMD1921	SMD2727	SMD3535	SMD3535
维护方式Maintenance	Rear			
安装方式Installation	Rear/Frame			
箱体尺寸Cabinet Size(mm)	960x960			
每平方像素点Density(dot/㎡)	40000	22500	15625	10000
亮度Brightness(cd/㎡)	5000-6000	5000-6000	5000-6000	6000-7500
防水等级IP Rate	IP65			
刷新率Refresh Rate(Hz)	3840-7680			
箱体重量Cabinet Weight (kg)	50			
箱体材料Cabinet Material	Die-cast aluminum			
灰度Grayscale	14-16Bit			
换帧频率Frame Change Frequency(Hz)	50/60			
视角Viewing Angle(V/H)	V160°/H160°			
最佳视距Best Viewing Distance(m)	>5	>6.67	>8	>10
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%			
最大/平均功耗Max./Avg. power consumption(w)	1000/200-500			
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%			
寿命Life Span(h)	> 100,000			

STADIUM LED SCREEN
球场屏
SD SERIES

960x960mm






960 die-cast + plastic base



960 die-casting + aluminum bottom casing

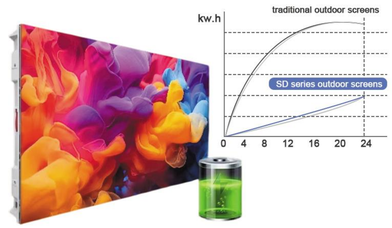

产品特点
PRODUCT FEATURES

节能
Energy Saving

易安装
Easy To Install

高精度
High Precision

散热快
Fast Heat Dissipation

易维护
Easy To Maintain

高刷新率
High Refresh Rate

高亮度
High Brightness

超轻薄
Thin Lightweight

产品参数/PRODUCT PARAMETERS

型号Model	P4.44	P5.71	P6.66	P8	P10
模组尺寸Module Size(mm)			480x320		
模组分辨率Module Resolution(dot)	216x216	168x168	144x144	120x120	96x96
扫描Scanning(s)	1/9	1/7	1/6	1/5	1/2
封装方式Encapsulation	SMD1415	SMD2727	SMD2727	SMD3535	SMD3535
维护方式Maintenance	Front/Rear				
安装方式Installation	Front/Rear				
箱体尺寸Cabinet Size(mm)	960x960x96				
每平方像素点Density(dot/㎡)	50625	30625	22500	15625	10000
亮度Brightness(cd/㎡)	>5000	>6000	>6000	>6000	>6500
防水等级IP Rate	IP65				
刷新率Refresh Rate(Hz)	3840-7680				
箱体重量Cabinet Weight (kg)	≤26.5				
箱体材料Cabinet Material	Die-cast aluminum				
灰度Grayscale	14-16Bit				
换帧频率Frame Change Frequency(Hz)	50/60				
视角Viewing Angle(V/H)	V160°/H160°				
最佳视距Best Viewing Distance(m)	>5	>7	>8	>10	>12
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%				
最大/平均功耗Max./Avg. power consumption(w)	800/320				
储存温度湿度Storage Temperature&Humidity(RH)	- 20℃ ~ 50℃/10% ~ 95%				
寿命Life Span(h)	> 100,000				

STADIUM LED SCREEN

球场屏

SE SERIES 16:9

1600x900mm









产品特点
PRODUCT FEATURES

节能
Energy Saving

无缝拼接
Seamless Splicing

全密封结构
Fully Sealed Structure

IP65 防水等级
IP65 Waterproof Rating

前后维护
Front Rear Maintenance

高刷新率
High Refresh Rate

高亮度
High Brightness

软面罩防护
Soft Face Shield Protection


产品参数/PRODUCT PARAMETERS

型号Model	P6.67	P8.33	P10
模组尺寸Module Size(mm)		400x300	
模组分辨率Module Resolution(dot)	60x45	48x36	40x30
扫描Scanning(s)	1/6	1/4	1/3
封装方式Encapsulation	SMD2727	SMD3535	SMD3535
维护方式Maintenance		Front/Rear	
安装方式Installation		Front/Rear	
箱体尺寸Cabinet Size(mm)		1600x900	
每平方像素点Density(dot/㎡)	22500	14400	10000
亮度Brightness(cd/㎡)		6500	
防水等级IP Rate		IP65	
刷新率Refresh Rate(Hz)		3840-7680	
箱体重量Cabinet Weight (kg)		≈52	
箱体材料Cabinet Material		Die-cast aluminum	
灰度Grayscale		14-16Bit	
换帧频率Frame Change Frequency(Hz)		50/60	
视角Viewing Angle(V/H)		V>170°/H>170°	
最佳视距Best Viewing Distance(m)	>6.67	>8	>10
输入电压Input Voltage(V)		AC110V±15%/AC220V±15%	
最大/平均功耗Max./Avg. power consumption(w)	630/250	550/200	550/200
储存温度湿度Storage Temperature&Humidity(RH)		- 20℃ ~ 60℃/10% ~ 90%	
寿命Life Span(h)		≥100,000	

STADIUM LED SCREEN
球场屏
SF SERIES 16:9

1600x900mm









产品特点
PRODUCT FEATURES

双系统
Dual System

无缝拼接
Seamless Splicing

安全防护
Safety Protection

快速安装
Fast Assembly

广视角
Wide Viewing Angle

高刷新率
High Refresh Rate

高亮度
High Brightness

遥控
Remote Control

产品参数/PRODUCT PARAMETERS

型号Model	P6.25	P8.33	P10
模组尺寸Module Size(mm)		400X300	
模组分辨率Module Resolution(dot)	256X144	192X108	160X90
扫描Scanning(s)	1/6	1/3	1/2
封装方式Encapsulation		SMD2727	
维护方式Maintenance		Front/Rear	
色温Color Temperature (K)		5000-12000 optionat	
箱体尺寸Cabinet Size(mm)		1600x900	
每平方像素点Density(dot/㎡)	25600	14400	10000
亮度Brightness(cd/㎡)		6500	
防水等级IP Rate		IP65	
刷新率Refresh Rate(Hz)		3840-7680	
箱体重量Cabinet Weight (kg)		45	
箱体材料Cabinet Material		Aluminum	
灰度Grayscale		14-16Bit	
换帧频率Frame Change Frequency(Hz)		50/60	
视角Viewing Angle(V/H)		V160°/H160°	
最佳视距Best Viewing Distance(m)	>6	>8	>10
输入电压Input Voltage(V)		AC110V±15%/AC220V±15%	
最大/平均功耗Max./Avg. power consumption(w)		680/120-200	
储存温度湿度Storage Temperature&Humidity(RH)		-20~60℃/10%~85%	
寿命Life Span(h)		> 100,000	


CREATIVE SCREEN SERIES

创意屏系列

Customization

我们支持定制化服务，为您提供独一无二的创意LED显示方案。

We support customized services, providing you with unique and creative LED display solutions.

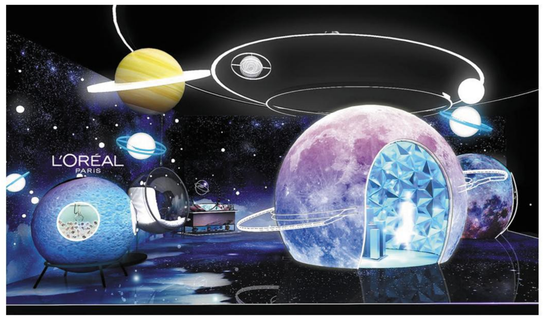







FRONT DESK LED SCREEN (DJ BOOTH)

前台屏

CFD SERIES

Customizable







产品特点
PRODUCT FEATURES

可定制
Customizable

易安装
Easy To Install

防水防撞
Waterproof
Collision Avoidance

方便移动
Convenient To Move

前维护
Front Maintenance

高刷新率
High Refresh Rate

一键播放
One Click Playback

高清
High Definition

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.538	P1.86	P2	P2.5
模组尺寸Module Size(mm)			320x160		
模组分辨率Module Resolution(dot)	256x128	208x104	172x86	160x80	128x64
扫描Scanning(s)	1/64	1/52	1/43	1/40	1/32
封装方式Encapsulation	GOB/SMD				
维护方式Maintenance	Front				
安装方式Installation	Front/Rear				
箱体尺寸Cabinet Size(mm)	Customizable				
每平方像素点Density(dot/㎡)	640000	422760	288369	250000	160000
亮度Brightness(cd/㎡)	600-1200				
防水等级IP Rate	IP43				
刷新率Refresh Rate(Hz)	3840				
箱体重量Cabinet Weight (kg)	Customizable				
箱体材料Cabinet Material	Iron				
灰度Grayscale	14-16Bit				
换帧频率Frame Change Frequency(Hz)	50/60				
视角Viewing Angle(V/H)	V160°/H160°				
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.8	>2	>2.5
输入电压Input Voltage(V)	AC110V±15%/AC220V±15%				
最大/平均功耗Max./Avg. power consumption(w)	800/420-560				
储存温度湿度Storage Temperature&Humidity(RH)	- 10℃ ~ 60℃/10% ~ 90%				
寿命Life Span(h)	> 100,000				


SHELF LED SCREEN


货架屏

CSH SERIES

300x60/600x60/900x60/960x320



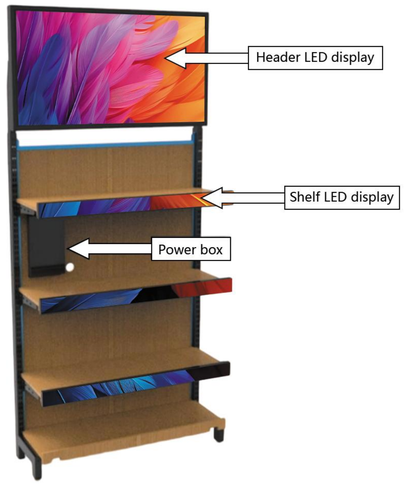

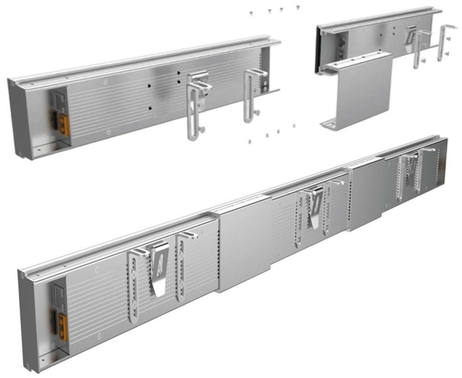

产品特点
PRODUCT FEATURES

可定制
Customizable

易安装
Easy To Install

无缝拼接
Seamless Splicing

轻薄
Ultra-Thin

COB表面处理技术
COB Surfaceprocessing Technology

高刷新率
High Refresh Rate

高亮度
High Brightness

高清
High Definition

产品参数/PRODUCT PARAMETERS

型号Model	P1.25	P1.56	P1.875
模组尺寸Module Size(mm)		150x56.25	
模组分辨率Module Resolution(dot)	120x45	96x36	80x30
扫描Scanning(s)	1/52	1/48	1/45
封装方式Encapsulation		COB	
维护方式Maintenance		Front	
安装方式Installation		Front	
箱体尺寸Cabinet Size(mm)		300x60/600x60/900x60/960x320/Customizable	
每平方像素点Density(dot/㎡)	422500	409600	284444
亮度Brightness(cd/㎡)		600	
防水等级IP Rate		IP45	
刷新率Refresh Rate(Hz)		3840	
箱体重量Cabinet Weight (kg)		Customizable	
箱体材料Cabinet Material		Profile Aluminum	
灰度Grayscale		14-16Bit	
换帧频率Frame Change Frequency(Hz)		50/60	
视角Viewing Angle(V/H)		V160°/H160°	
最佳视距Best Viewing Distance(m)	>1.3	>1.5	>1.8
输入电压Input Voltage(V)		AC110V±15%/AC220V±15%	
储存温度湿度Storage Temperature&Humidity(RH)		- 10℃ ~ 60℃/10% ~ 90%	
寿命Life Span(h)		> 100,000	

SPHERE LED SCREEN
球形屏
CSP SERIES

Customize

广泛应用于商业展厅、大型展会、舞台演出、科技馆、天文馆及城市地标等场景。

Widely used in commercial showrooms, large-scale exhibitions, stage performances, science museums, planetariums, and urban landmarks.



Hanging



Hemisphere Hanging



Base Standing



产品效果/PRODUCT EFFECTS











MAGIC CUBE LED SCREEN
魔方屏
CCU SERIES

Customize

广泛于店铺门头、展览标志、室内装饰以及舞台背景等，通过立体动态显示有效吸引目光、展示信息。

Widely used in shop facades, exhibition signs, interior decoration, and stage backdrops, it effectively attracts attention and displays information through three-dimensional dynamic displays.




Wall Mounted Installation




Vertical Installation



产品效果/PRODUCT EFFECTS

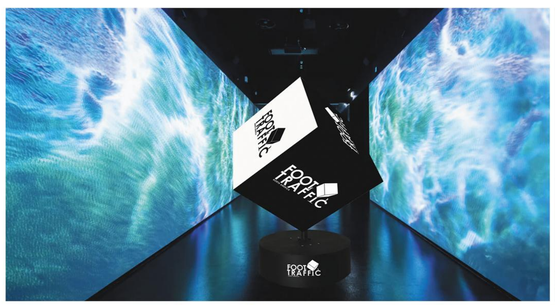

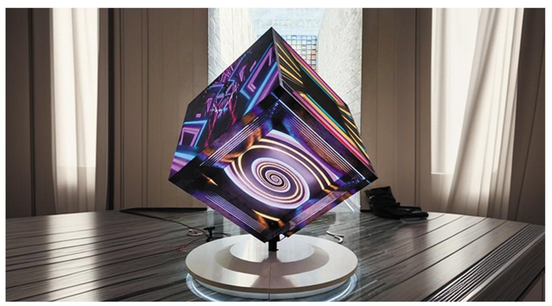








CIRCULAR/LOGO LED SCREEN
圆形/LOGO屏
CRO/CLO SERIES

Customize



CRO SERIES





CLO SERIES


工程案例/PROJECT CASE



Application Area: Pawnshops
Location: Panama
Product: P2.5 Outdoor Circular LED Screen
Screen Size: 0.5 Square Meters



Application Scenario: Store
Location: Türkiye
Product: P3 Circular LED Full-Color Screen
Screen Size: 10 Square Meters

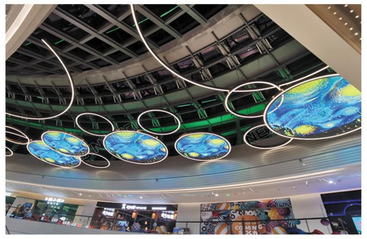

Application Scenario: Indoor
Location: France
Product: P4 Circular LED Screen
Screen Size: 54 Square Meters



Application: Exhibition
Location: New Zealand
Product: Round Full-Color Screen
Screen Size: 15 Square Meters



Application : Coffee Shop
Location : Norway
Product : P2 Round Full-Color Screen
Screen Size : 0.6 Square




Application Area: Outdoor Advertising
Location: New Zealand
Product: P3 Custom Circular Screen
Screen Size: 11 Square Meters

CREATIVE LED SCREEN
创意屏
CDJ/CLO SERIES

Customize

CDJ系列采用室内显示模块,可实现灯光与音响效果同步，可以定制不同的形状。

The CDJ series uses indoor display modules and can synchronize lighting and sound effects, with customizable shapes available.

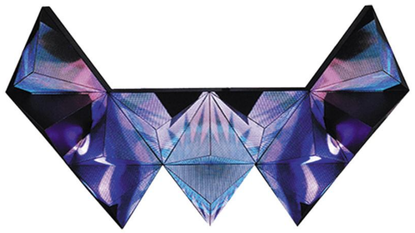

CDJ SERIES









CPD系列专为教学、会议、演讲等场景设计，用于展示文字、图像、视频等内容。

The CPD series is designed for scenarios such as teaching, meetings, and presentations, and is used to display text, images, videos, and other content.





CPD SERIES

CREATIVE LED SCREEN
创意屏
CCA/CBU SERIES

Customize

CCA系列独特的设计能瞬间抓住消费者的视线，强化受众对广告内容的印象，提升品牌认知度。

The unique design of the CCA series instantly captures consumers' attention, reinforcing their impression of the advertising content and enhancing brand awareness.



CCA SERIES





CBU系列可安装在公交车内实时显示文字、图形等信息，具有高亮度、低功耗、可靠性强等特点。

The CBU series can be installed inside buses to display text, graphics, and other information in real time, and features high brightness, low power consumption, and high reliability.





CBU SERIES

CREATIVE LED SCREEN
创意屏
CTX/CCD SERIES

Customize


CTX系列可安装在出租车车顶播放动态图文、视频内容，将出租车转变为流动的“信息窗口”。

The CTX series can be installed on the roofs of taxis to display dynamic images, text, and video content, transforming taxis into mobile "information windows."



CTX SERIES



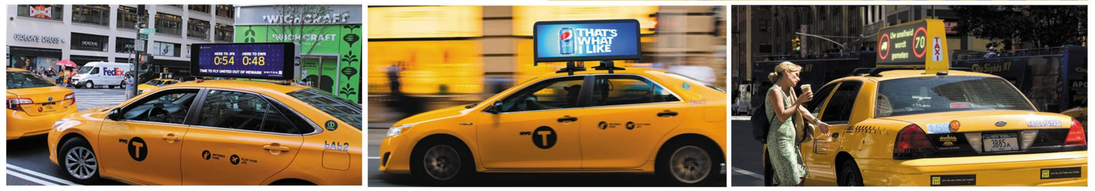

CDD系列广泛应用于珠宝店、奢侈品展厅、博物馆等场景，可以动态展示商品信息、品牌故事等。

The CDD series is widely used in jewelry stores, luxury showrooms, museums and other settings, and can dynamically display product information, brand stories and more.





CDD SERIES

CREATIVE LED SCREEN
创意屏
CTR/CCS SERIES

Customize

CTR系列是专门为卡车、货车等商用车辆设计的显示设备，用于实时展示警示信息、广告内容等。

The CTR series is a display device specifically designed for commercial vehicles such as trucks and vans, used to display warning messages, advertisements, and other information in real time.



CTR SERIES





CCS系列是将LED显示屏与宗教“十字架”相结合，主要用于教堂、宗教场所、宗教活动等场景。

The CCS series combines LED display screens with the religious symbol of the "cross," and is primarily used in churches, religious venues, and for religious events.





CCS SERIES

CREATIVE LED SCREEN
创意屏
CTX/CCD SERIES

Customize

CLE系列专用于显示字母、数字及基础符号的显示设备，具有高亮度、远距离清晰可视的特点。

The CLE series is a display device specifically designed for displaying letters, numbers, and basic symbols, featuring high brightness and clear visibility from a distance.



CLE SERIES





CTP系列可用于道路信息发布，能动态显示路况、事故、限速等信息，提升道路安全与通行效率。

The CTP series can be used for road information dissemination, dynamically displaying information such as road conditions, accidents, and speed limits, thereby improving road safety and traffic efficiency.





CTP SERIES

PROJECT CASE
工程案例



Application: Hotel
Location: Panama
Product: P2.5 FA Series
Screen Size: 36 Square Meters




Application: meeting
Location: Colombia
Product: P3 FA Series
Screen Size: 28 Square Meters



Application: Outdoor Stage
Location: Russia
Product: P3.91 RA Series
Screen Size: 48 Square Meters



Application Area: Indoor Advertising
Location: USA
Product: P2.5 HXR Series
Screen Size: 154 Square Meters

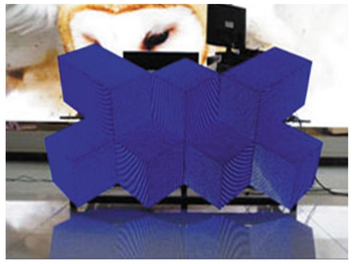

Application: DJ Booth
Location: Malaysia
Product: P5 CDJ Series
Screen Size: 3 Square Meters



Application: Outdoor Advertising
Location: United States
Product: P8 FE Series
Screen Size: 16 Square Meters



Application: Exhibition
Location: Philippines
Product: P4 FC Series
Screen Size:17 Square Meters



Application: Restaurant
Location: Saudi Arabia
Product: P5 FB Series
Screen Size: 9 Square



Application: Outdoor Advertising
Location: United States
Product: P5 FE Series
Screen Size:175 Square Meters



Application: Exhibition Halls
Location: Russia
Product: P2 HXR Series
Screen Size: 316 Square Meters



Application: outdoor advertising
Location: Germany
Product: P6 FD Series
Screen Size: 68 Square Meters




Application: Outdoor Advertising
Location: Canada
Product: P10 FB Series
Screen Size: 158 Square Meters



Application: Outdoor
Location: France
Product: P6 RE Series
Screen Size: 42 Square Meters



Application: Outdoor Rental
Location: United States
Product Name: P3.91 RA Series
Screen Size: 64 Square Meters

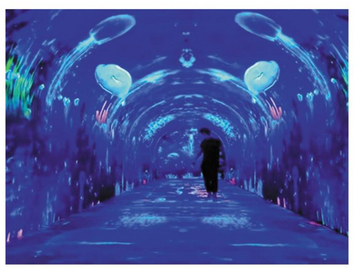

Application: Indoor Aquarium
Location: France
Product: P2 HXR Series
Screen Size: 322 Square Meters



Application: Outdoor Car Ad
Location: Canada
Product: P4 FE Series
Screen Size: 36 Square Meters




Application: Outdoor Advertising
Location: Qatar
Product: P5 FF Series
Screen Size: 56 Square Meters




Application: Indoor Advertising
Location: South Korea
Product: P2.5 PB Series
Screen Size: 1.23 Square Meters

LED KNOWLEDGE
LED知识

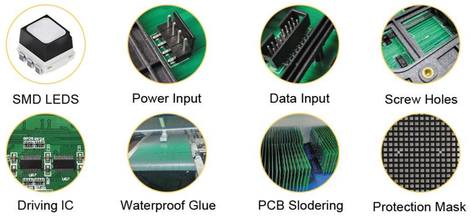



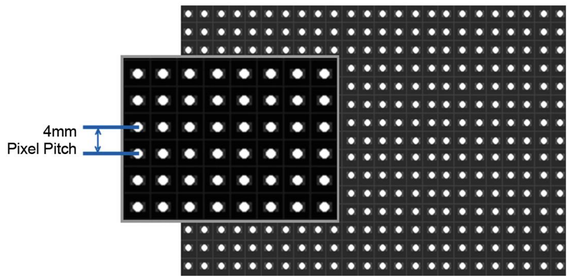


LED灯珠间距越小，显示效果越好，图像和视频的细节更丰富，线条更平滑，文字更锐利，在近距离观看时也看不到颗粒感。

The smaller the spacing between LED beads, the better the display effect, the richer the details of images and videos, the smoother the lines, the sharper the text, and the less noticeable the graininess when viewed up close.


LED显示屏安装过程/LED SCREEN ASSEMBLY PROCESS



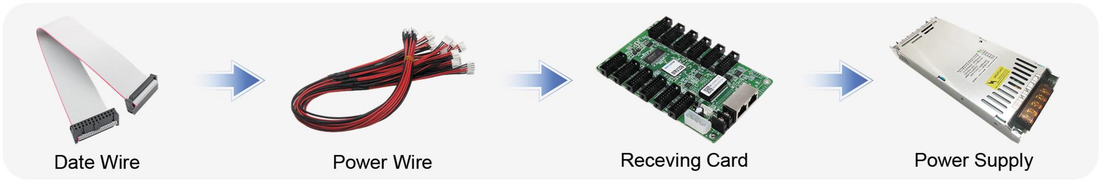




最佳观看距离/OPTIMAL VIEWING DISTANCE (IN METER)

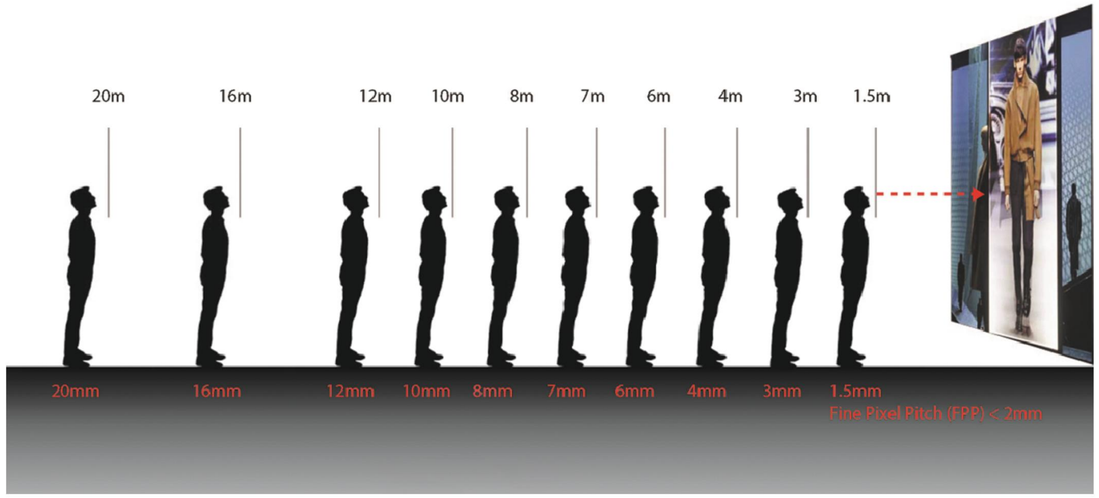


观看距离是一个重要的值，它定义了相邻两个LED灯珠中心点的距离。 例如，如果我们需要一个 8x5的屏幕，如果我们想要8m以上的最佳视觉，我们可以选择8mm或10mm的像素间距。但是如果我们想让屏幕更清晰，那么像素间距最好选择5mm或6mm。

Viewing distance is an important value; it defines the distance between the center points of two adjacent LED beads. for example, if we need an 8x5m screen and want the best viewing distance above 8m eters, we can choose a pixel pitch of 8mm or 10mm. however, if we want a clearer screen, then a pixel pitch of 5mm or 6mm is better.

封装技术/ENCAPSULATION TECHNOLOGY

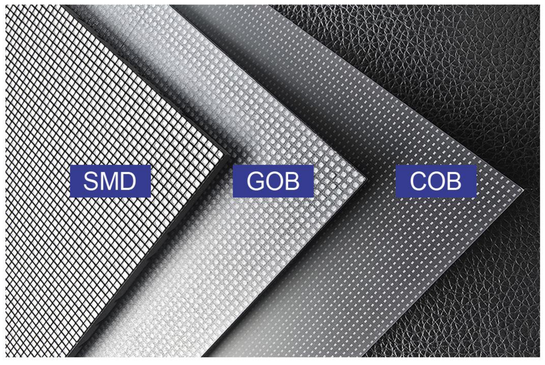

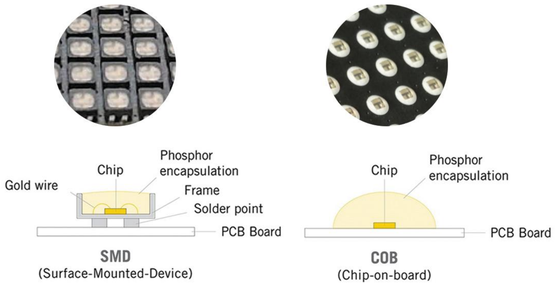

SMD(表贴式): 灯珠像贴纸一样贴在电路板表面。这是目前的主流，视角广、混色好，室内室外都在用。

SMD (Surface Mount Device): LED chips are mounted on the surface of the circuit board like stickers. this is currently the mainstream technology, offering wide viewing angles and good color mixing, and is used both indoors and outdoors.

COB(板上封装): 直接将芯片集成在PCB上。这是未来的趋势，更稳定、防撞，主要用于高端小间距屏幕。

COB (Chip-on-Board): Chips are directly integrated onto the PCB. this is the future trend, offering greater stability and impact resistance, primarily used in high-end, small-pitch LED displays.